

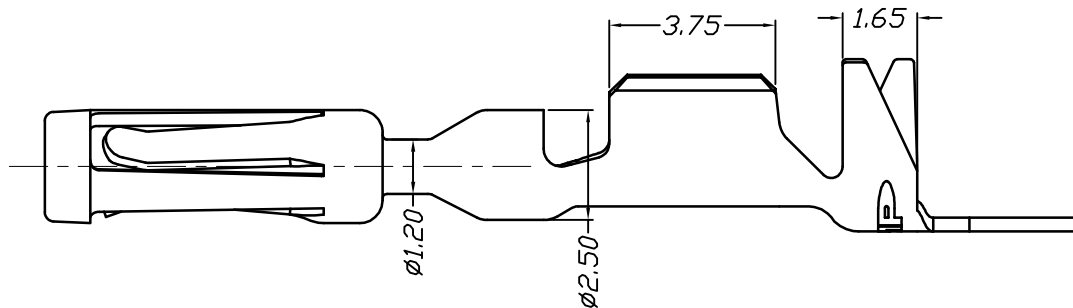
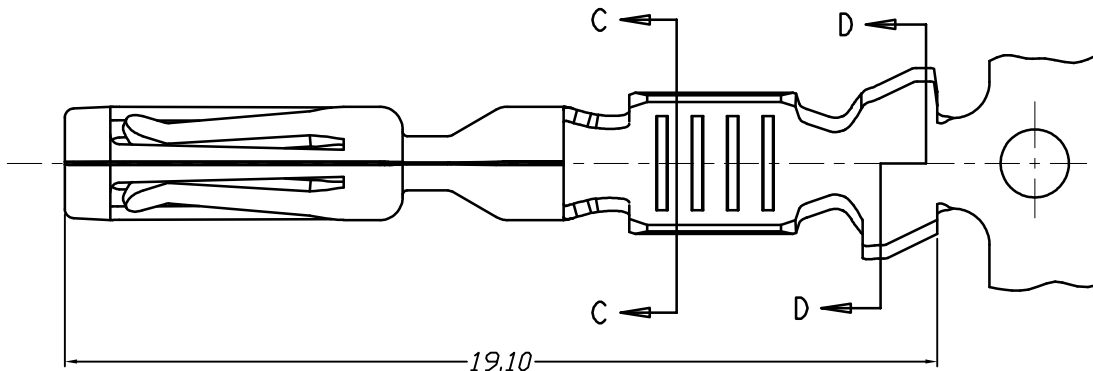



环保物料

Specifications:

Voltage Rating : 600V AC/DC
 Current Rating : 8A AC,DC
 Withstand Voltage : 1500V AC/minute
 Contact Resistance : 10mΩ(MAX.)
 Insulation Resistance : 1000V DC/1000MΩ(MIN.)
 Temperature Range : -40°C~+105°C



SECTION D-D



SECTION C-C

Part No	Wire Range	WIRE SIZES	Material	Finish
44002T00-**	AWG#16-20	1.0mm ²	Phosphor Bronze	Sn or Au

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
AO	新图面发行	2018. 7. 28	MM	0.00±0.25	X° ±3°			
	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°		肖坤权	2018. 7. 28



PART. NO: 44002TOP-**

DWG. NO: ENDE05

REV: AO SHEET: 1/1

TITLE: 4.00mm pitch Crimp Terminal