

环保物料

Specifications:

Voltage Rating : 250V AC/DC

Current Rating : 8A AC,DC

Withstand Voltage : 1500V AC/minute




Contact Resistance : 15mΩ(MAX.)

Insulation Resistance : 100MΩ(MIN.)

Temperature Range : -55°C~+105°C

1 circuits

2 to 4 circuits

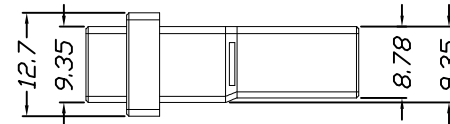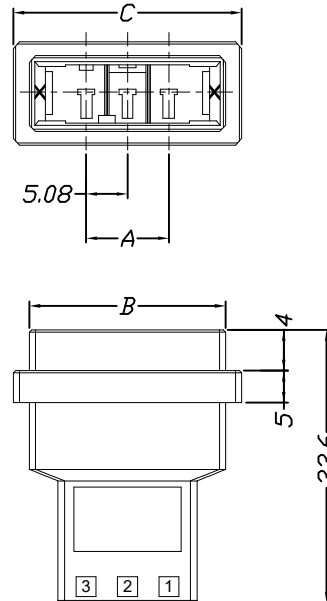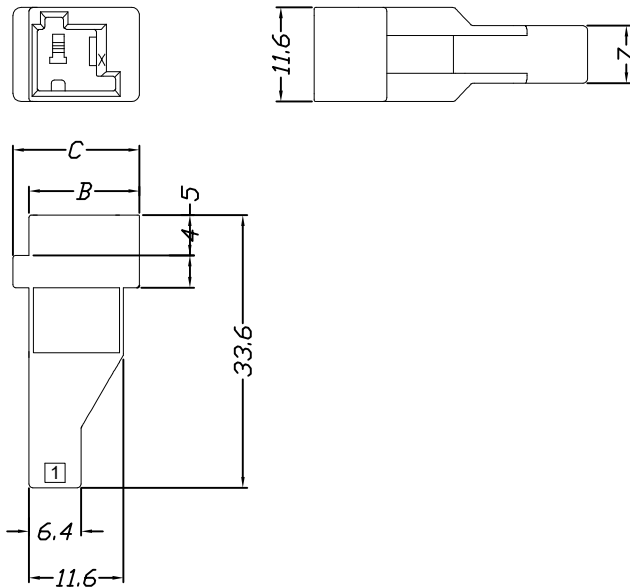

Unit: mm

Part No.	Dimensions		
	A	B	C
1P	-	13.60	15.60
2P	5.08	19.08	23.03
3P	10.16	24.16	28.11
4P	15.24	29.24	33.19

Material	Color
PBT,UL94V-0	Gray

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	康导新能源 网址: www.dgoonne.com 电话: 0769-853377633 邮箱: 2850175906@qq.com 传真: 0769-853922827	PART. NO: 35081H00-NP*-PT
				LINEAR	ANGLES					
AO	新图面发行	2017.06.16	UNIT: MM	0.00±0.15	X° ±3°		黎腾	2017.06.16		
			SIZE: A4	0.000±0.08	X° X'±2°		肖坤权	2017.06.16		
							旷淇	2017.06.16	TITLE: 5.08mm pitch Single Housing	REV: AO SHEET: 1/1