








环保物料

Specifications:  
 Voltage Rating : 250V AC/DC  
 Current Rating : 8A AC,DC  
 Withstand Voltage : 1500V AC/minute  
 Contact Resistance : 15mΩ(MAX.)  
 Insulation Resistance : 100MΩ(MIN.)  
 Temperature Range : -55°C~+105°C

1 circuits



2 to 4 circuits

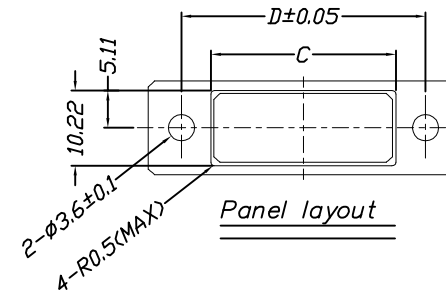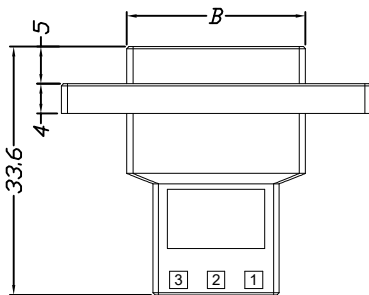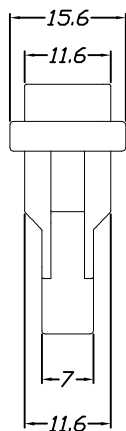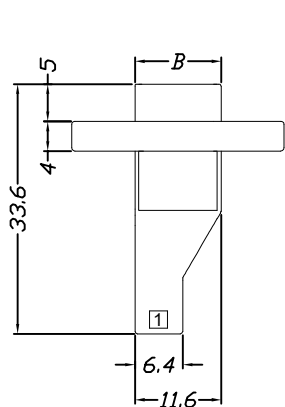

Unit: mm

Part No.	Dimensions				
	A	B	C	D	E
1P	-	11.60	12.60	21.00	28.60
2P	5.08	19.08	20.00	28.00	36.83
3P	10.16	24.16	25.00	33.00	41.91
4P	15.24	29.24	30.00	38.00	46.99

Material	Color
PBT,UL94V-0	Gray

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	康导新能源	PART. NO: 35081H01-NP*-PT
				LINEAR	ANGLES					
A0	新图面发行	2017.06.16	MM	0.00±0.15	X° ±3°	APPROVED	黎腾	2017.06.16	网址: www.dgconne.com 电话: 0769-85377633 邮箱: 2850175988@qq.com 传真: 0769-853922827	DWG. NO: ENDE05
			A4	0.000±0.08	X° X'±2°	DESIGNER	肖坤权	2017.06.16	TITLE: 5.08mm pitch Single Housing	REV: A0 SHEET: 1/1
						DRAWN	旷淇	2017.06.16		