
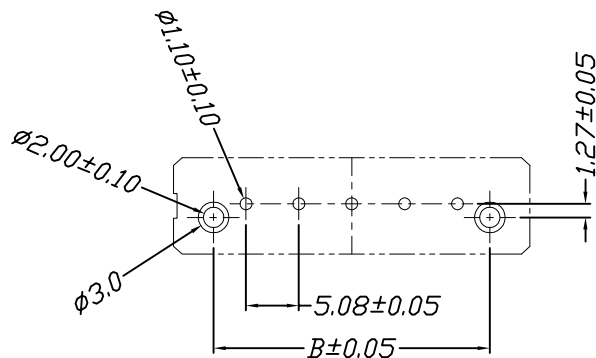
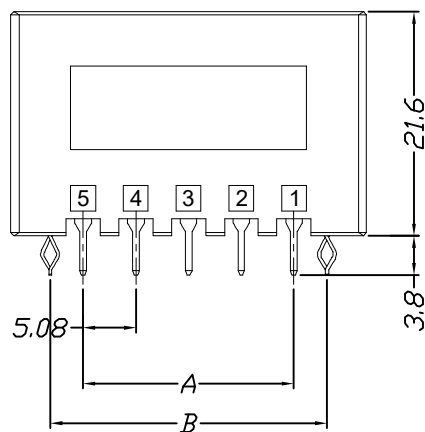



环保物料

Specifications:

Voltage Rating : 250V AC/DC
 Current Rating : 8A AC,DC
 Withstand Voltage : 1500V AC/minute
 Contact Resistance : 15mΩ(MAX.)
 Insulation Resistance : 1000V DC/1000MΩ(MIN.)
 Temperature Range : -55°C~+105°C

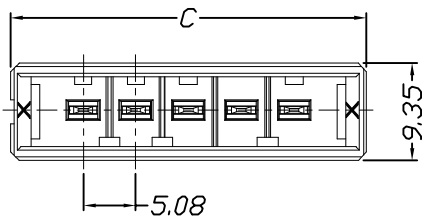

P.C.B. LAYOUT

Part No.	Dimensions		
	A	B	C
2P	5.08	11.43	19.08
3P	10.16	16.51	24.16
4P	15.24	21.59	29.24
5P	20.32	26.67	34.32
6P	25.40	31.75	39.40

Material	Color	PIN Material	Stator Material
NYLON&PBT,UL94V-0	Black	Brass/Tin-plated	Brass/Tin-plated

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
AO	新图面发行	2018. 7. 28	MM	0.00±0.25	X° ±3°	APPROVED		
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°	DESIGNER	肖坤权	2018. 7. 28

康导新能源
 网址: www.dgconne.com 电话: 0769-85337633
 邮箱: 2850175986@qq.com 传真: 0769-85392827

PART NO:	45081W00-NP*-A1-**	
DWG. NO:	ENDE05	
REV:	A0	SHEET: 1/1

TITLE: 5.08mm pitch Single Wafer