


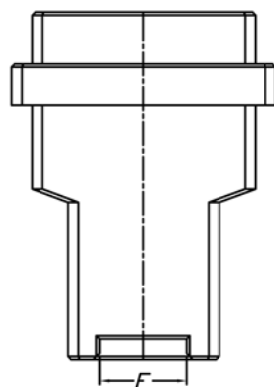
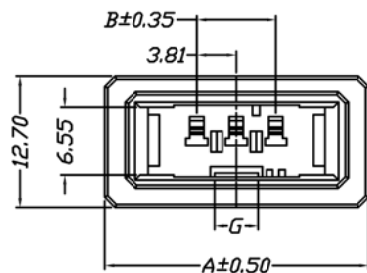



环保物料

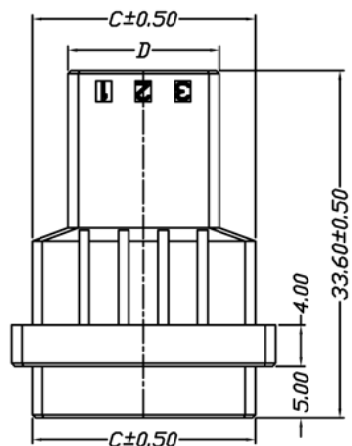


3P右防呆专用规格



3P左防呆专用规格



其它规格

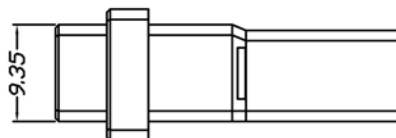

Specifications:

Voltage Rating : 250V AC/DC
 Current Rating : 8A AC,DC
 Withstand Voltage : 1500V AC/minute
 Contact Resistance : 15mΩ(MAX.)
 Insulation Resistance : 1000V DC/1000MΩ(MIN.)
 Temperature Range : -55°C~+105°C

Circuits Part No	Dimensions					
	A	B	C	D	F	G
10P	52.24	34.29	48.29	41.29	18.4	4.0
8P	44.62	26.67	40.67	33.67	18.4	4.0
5P	33.19	15.24	29.24	22.24	18.4	4.0
3P	25.57	7.62	21.62	14.62	8.4	2.0
Material			Color			
PBT,UL94V-0			Black			

REV.	REVISION RECORD	DATE	SIZE: A4	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
A0	新图面发行	2018. 7. 28	UNIT: MM	0.00±0.25	X° ±3°	APPROVED		
	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°	DESIGNER	肖坤权	2018. 7. 28



PART. NO:
33811H00-NPA-2-PT

DWG. NO:
ENDE05

REV: A0 SHEET: 1/1

TITLE:
3.81mm pitch Single Housing