

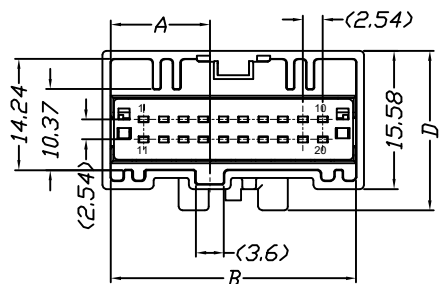


环保物料

Specifications:

Voltage Rating : 250V AC/DC
 Current Rating : 3A AC,DC
 Withstand Voltage : 1500V AC/minute
 Contact Resistance : 40mΩ(MAX.)
 Insulation Resistance : 1000V DC/1000MΩ(MIN.)
 Temperature Range : -40°C~+105°C



| Part No. | Dimensions | | | |
|-------------|------------|-------|-------|-------|
| | A | B | C | D |
| 2*3P | 3.76 | 13.51 | 15.61 | 19.78 |
| 2*4P | 5.03 | 16.05 | 18.05 | 19.78 |
| 2*5P | 6.30 | 18.59 | 20.69 | 19.78 |
| 2*6P | 7.57 | 21.28 | 23.23 | 20.34 |
| 2*8P | 10.11 | 26.36 | 28.31 | 20.34 |
| 2*10P | 12.65 | 31.44 | 33.39 | 20.34 |
| Material | | | Color | |
| PBT,UL94V-0 | | | Black | |

| | | | | | | | | | | | |
|------|-----------------|------|----------|--------------------|------------|---------------|------|-----------|--|-------------------------------------|--|
| | | | | GENERAL TOLERANCES | | SCALE: 1:1 | NAME | DATE | <p>康导新能源</p> <p>网址: www.dgoonne.com 电话: 0769-85337633 邮箱: 2850175986@qq.com 传真: 0769-85392827</p> | PART. NO: 42541H01-2XNP*-PT | |
| | | | | LINEAR | ANGLES | APPROVED | | | | DWG. NO: ENDE05 | |
| | | | | 0.0±0.35 | X° REF±6° | DESIGNER | | | | REV: A0 SHEET: 1/1 | |
| | | | | 0.00±0.25 | X° ±3° | DRAWN | 肖坤权 | 2018.7.28 | | TITLE: 2.54mm pitch Dual Housing | |
| REV. | REVISION RECORD | DATE | UNIT: MM | SIZE: A4 | 0.000±0.15 | X° X'±2° | | | | | |

新图面发行

2018.7.28

UNIT: MM

SIZE: A4

DRAWN 肖坤权 2018.7.28

TITLE:
2.54mm pitch Dual Housing

REV: A0

SHEET: 1/1