
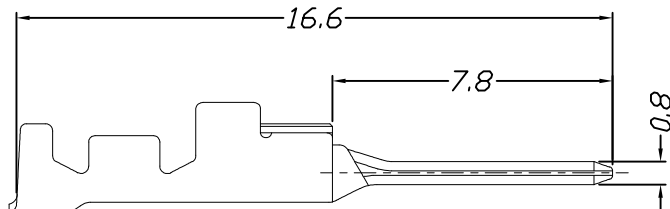



环保物料

Specifications:

Voltage Rating : 250V AC/DC
 Current Rating : 4.6A AC,DC
 Withstand Voltage : 1500V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 1000V DC/1000MΩ(MIN.)
 Temperature Range : -55°C~+105°C

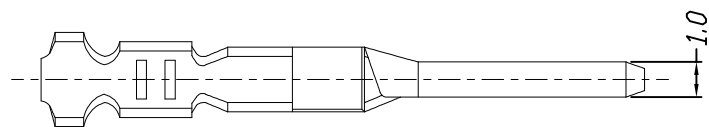

Part No	Wire Range	Insulation O. D.	Material	Finish
32503T 0P-**	AWG#28 -#24	0.88mm-1.43mm (1.43mm max)	Phosphor Bronze	Au or Sn
32503T 1P-**	AWG#24 -#20	1.11mm-1.53mm (1.53mm max)	Phosphor Bronze	Au or Sn
32503T 2P-**	-	1.30mm-1.90mm (1.90mm max)	Phosphor Bronze	Au or Sn
32503T 3P-**	AWG#24 -#20	1.11mm-1.53mm (1.53mm max)	Phosphor Bronze	Au or Sn

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 康导新能源 网址: www.dgoonne.com 电话: 0769-85337633 邮箱: 2850175988@qq.com 传真: 0769-85392827	PART. NO: 32503T*P-**	
				LINEAR	ANGLES	APPROVED				DWG. NO: ENDE05	
				0.0±0.35	X° REF±6°	DESIGNER				REV: AO	SHEET: 1/1
AO	新图面发行	2018.7.28	UNIT: MM	0.00±0.25	X° ±3°	DRAWN	肖坤权	2018.7.28		TITLE: 2.50mm pitch Crimp Terminal	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°						