
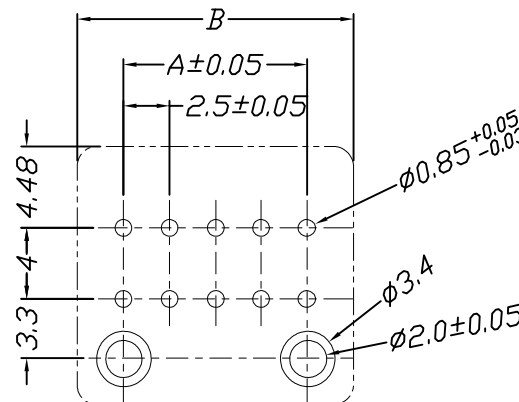
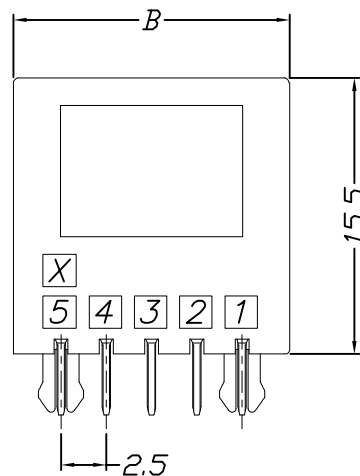
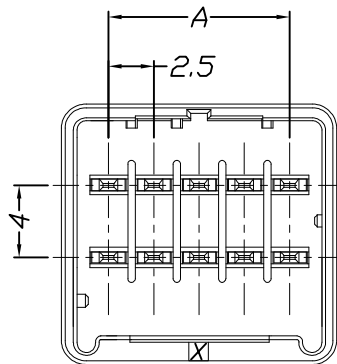


环保物料

Specifications:

Voltage Rating : 250V AC/DC  
 Current Rating : 4.6A AC,DC  
 Withstand Voltage : 1500V AC/minute  
 Contact Resistance : 20mΩ(MAX.)  
 Insulation Resistance : 1000V DC/1000MΩ(MIN.)  
 Temperature Range : -55°C~+105°C

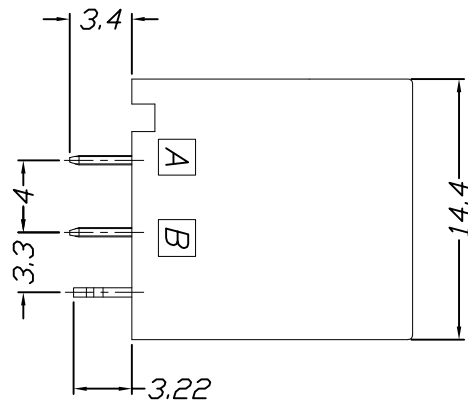

P.C.B. LAYOUT

Part No.	Dimensions	
	A	B
2*3P	5.00	10.20
2*4P	7.50	12.70
2*5P	10.00	15.20
2*6P	12.50	17.70
2*8P	17.50	22.70
2*10P	22.50	27.70

Material	Color	PIN Material	Stator Material
NYLON&PBT,UL94V-0	Black	Brass	Brass



GENERAL TOLERANCES

SCALE:  
1:1

NAME

DATE

LINEAR	ANGLES
0.0±0.35	X° REF±6°
0.00±0.25	X° ±3°
0.000±0.15	X° X'±2°

0.0±0.35

0.00±0.25

0.000±0.15

X° REF±6°

X° ±3°

X° X'±2°

APPROVED

DESIGNER

DRAWN

肖坤权

2018.7.28



康导新能源

网址: www.dgoonne.com 电话: 0769-85337633  
 邮箱: 2850175986@qq.com 传真: 0769-85392827

PART NO:

42503W00-2XNP\*-A1-\*\*-

DWG NO:

ENDE05

REV: AO

SHEET: 1/1

AO 新图面发行

2018.7.28

UNIT: MM

SIZE: A4

肖坤权

2018.7.28

TITLE:  
2.50mm pitch Dual Wafer

1

2

3

4

5

6

7

8