

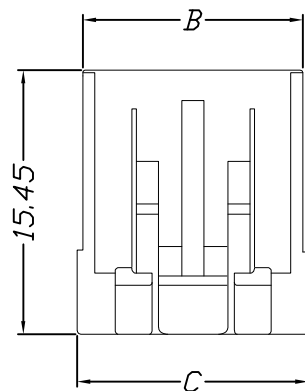
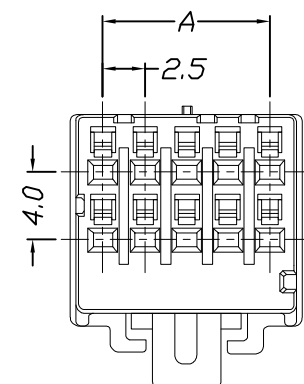


环保物料

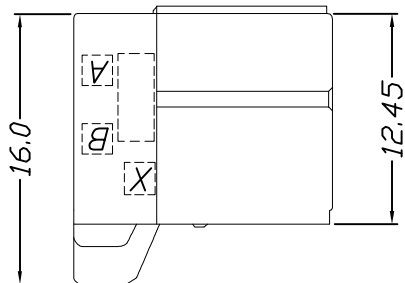

Specifications:

Voltage Rating : 250V AC/DC
 Current Rating : 4.6A AC,DC
 Withstand Voltage : 1500V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 1000V DC/1000MΩ(MIN.)
 Temperature Range : -55°C~+105°C

Part No.	Dimensions		
	A	B	C
2*3P	5.00	8.30	8.90
2*4P	7.50	10.80	11.40
2*5P	10.00	13.30	13.90
2*6P	12.50	15.80	16.40
2*8P	17.50	20.80	21.40
2*10P	22.50	25.80	26.40

Material	Color
PBT,UL94V-0	Black

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
				0.0±0.35	X° REF±6°	APPROVED		
AO	新图面发行	2018.7.28	UNIT: MM	0.00±0.25	X° ±3°	DESIGNER		
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°	DRAWN	肖坤权	2018.7.28

康导新能源
 网址: www.dgoonne.com 电话: 0769-85337633
 邮箱: 2850175986@qq.com 传真: 0769-85392827

TITLE:
2.50mm pitch Dual Housing

PART. NO:	42503H00-2XNP*-PT	
DWG. NO:	ENDE05	
REV:	AO	SHEET: 1/1