
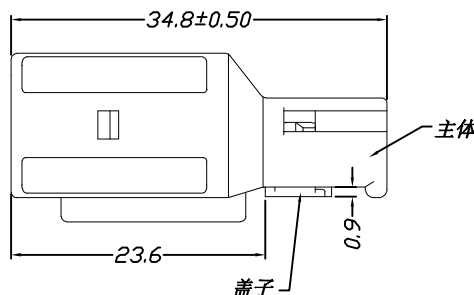
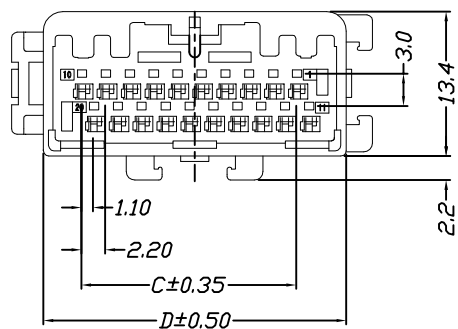


环保物料

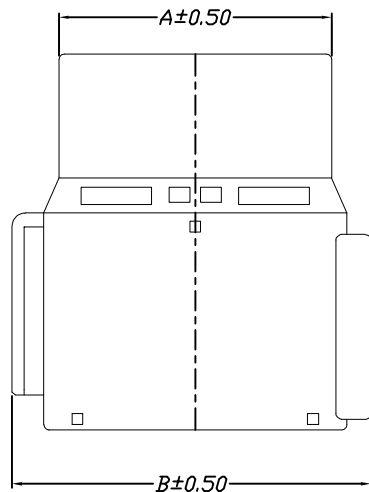

Specifications:

Voltage Rating : 250V AC/DC

Current Rating : 3A AC,DC

Withstand Voltage : 650V AC/minute

Contact Resistance : 30mΩ(MAX.)

Insulation Resistance : 100MΩ(MIN.)

Temperature Range : -40°C~+85°C

Dimensional Information:

Part No	Dimensions			
	A	B	C	D
2*6P	16.30	24.20	11.00	19.10
2*8P	20.70	28.60	15.40	23.50
2*10P	25.10	33.00	19.80	27.90
2*12P	29.50	37.40	24.20	32.30
2*14P	33.90	41.80	28.60	36.70
2*16P	38.30	46.20	33.00	41.10
2*18P	42.70	50.60	37.40	45.50
2*20P	47.10	55.00	41.80	49.90

Material	Color
PA66,UL94V-0	Gray

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
AO	新图面发行	2017.06.16	MM	0.00±0.15	X° ±3°	APPROVED	黎腾	2017.06.16
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DESIGNER	肖坤权	2017.06.16
						DRAWN	旷淇	2017.06.16



PART. NO:  
**32202H00-2\*NP\*-G2-66**

DWG. NO:  
ENDE05

TITLE:  
**2.20mm pitch Dual Housing**

REV: AO SHEET: 1/1