



环保物料

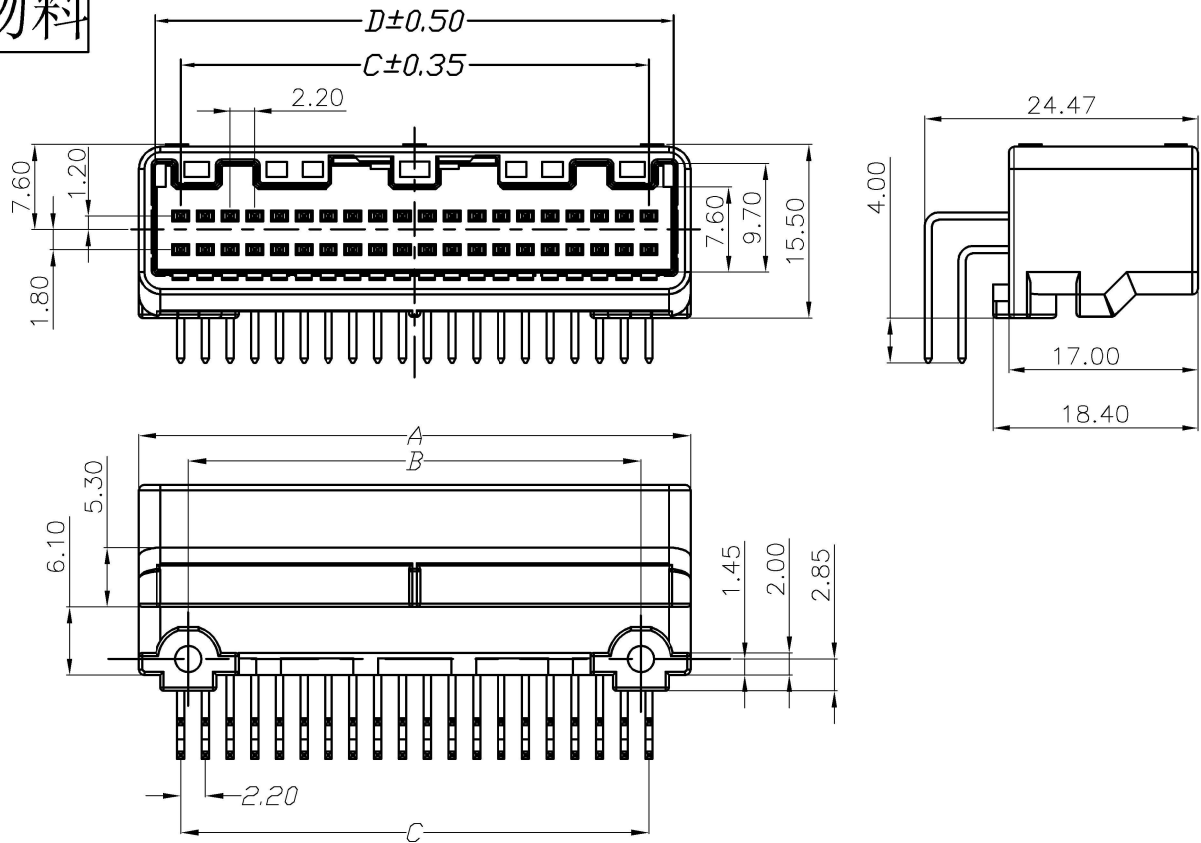

Specifications:  
 Voltage Rating : 250V AC/DC  
 Current Rating : 3A AC,DC  
 Withstand Voltage : 1000V AC/minute  
 Contact Resistance : 30mΩ(MAX.)  
 Insulation Resistance : 1000MΩ(MIN.)  
 Temperature Range : -40°C~+105°C

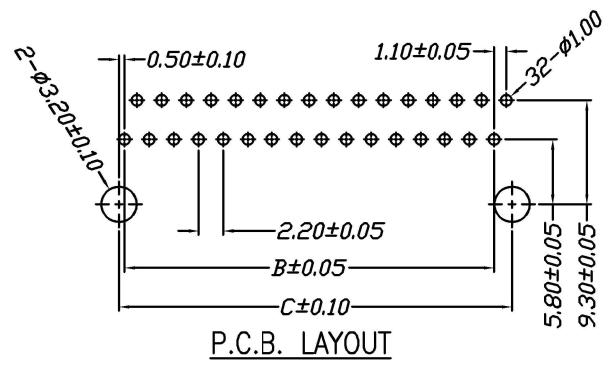

P.C.B. LAYOUT

Part No	Dimensions			
	A	B	C	D
2*6P	18.60	9.60	11.00	15.60
2*8P	23.00	14.00	15.40	20.00
2*10P	27.40	18.40	19.80	24.40
2*12P	31.80	22.80	24.20	28.80
2*14P	36.20	27.20	28.60	33.20
2*16P	40.60	31.60	33.00	37.60
2*18P	45.00	36.00	37.40	42.00
2*20P	49.40	40.40	41.80	46.40

Material	Color	PIN Material
PBT,UL94V-0	WHITE	Brass

		GENERAL TOLERANCES		SCALE:	NAME	DATE
		LINEAR	ANGLES	1:1		
		0.0±0.25	X° REF±6°	APPROVED	黎腾	2017.06.16
A0	新图面发行	2017.06.16	UNIT: MM	DESIGNER	肖坤权	2017.06.16
REV.	REVISION RECORD	DATE	SIZE: A4	DRAWN	旷淇	2017.06.16
			0.00±0.15			
			0.000±0.08			

**康导新能源**  
 网址: www.dgoonne.com 电话: 0769-85337763  
 邮箱: 2850175686@qq.com 传真: 0769-85392282

TITLE:  
 2.20mm pitch Dual Wafer

PART. NO:		42206W90-2*NP*-A1-**	
DWG. NO:		ENDE05	
REV:	A0	SHEET:	1/1