


环保物料

Specifications:
 Voltage Rating : 125V AC/DC
 Current Rating : 2A AC,DC
 Withstand Voltage : 1250V AC/minute
 Contact Resistance : 40mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -40°C~+105°C

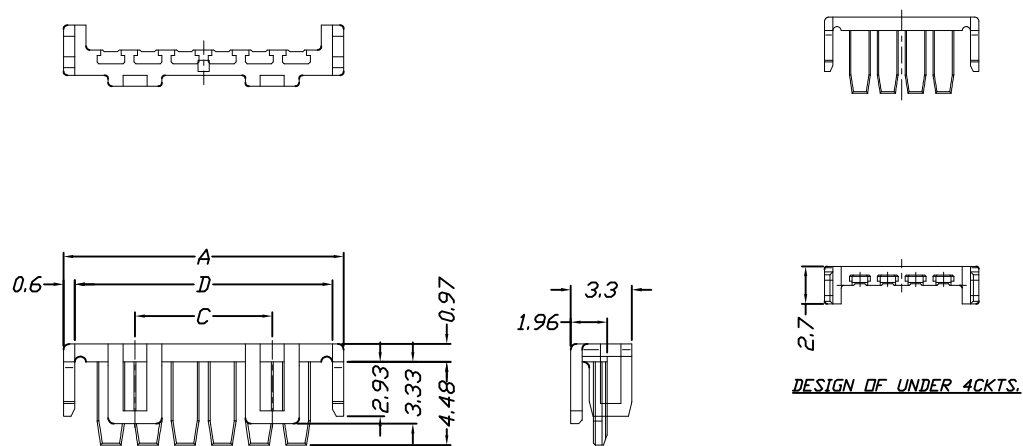

Unit: mm

Part No.	Dimensions			
	A	B	C	D
2P	7.10	2.00	-	5.90
3P	9.10	4.00	-	7.90
4P	11.10	6.00	-	9.90
5P	13.10	8.00	7.40	11.90
6P	15.10	10.00	7.40	13.90
7P	17.10	12.00	7.40	15.90
8P	19.10	14.00	7.40	17.90
9P	21.10	16.00	7.40	19.90
10P	23.10	18.00	7.40	21.90
11P	25.10	20.00	7.40	23.90
12P	27.10	22.00	7.40	25.90
13P	29.10	24.00	7.40	27.90
14P	31.10	26.00	7.40	29.90
15P	33.10	28.00	7.40	31.90

Material	Color
PA66,UL94V-0	Gray

		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	康导新能源 网址: www.dgoonne.com 电话: 0769-85537633 邮箱: 2860175988@qq.com 传真: 0769-855922627	PART NO: 42014R00-NP*-66	
		LINEAR	ANGLES	APPROVED	黎腾	2017.06.16		DWG. NO: ENDE05	
A0	新图面发行	0.00±0.15	X° REF±6°	DESIGNER	肖坤权	2017.06.16		REV: A0 SHEET: 1/1	
REV.	REVISION RECORD	0.000±0.08	X° X'±2°	DRAWN	旷淇	2017.06.16		TITLE: 2.00mm pitch Retainer	