

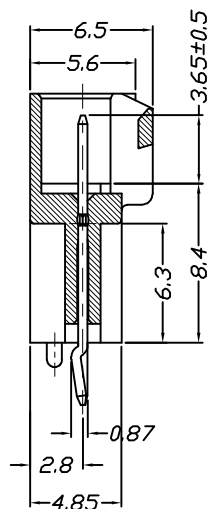

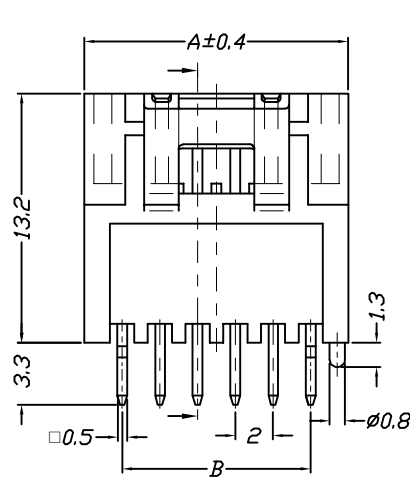


环保物料

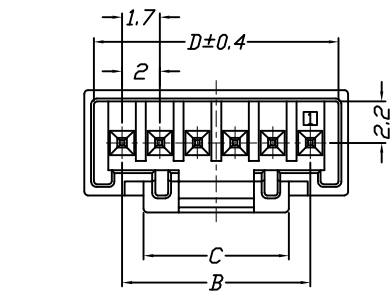

Specifications:

Voltage Rating : 125V AC/DC

Current Rating : 2A AC,DC

Withstand Voltage : 1250V AC/minute

Contact Resistance : 40mΩ(MAX.)

Insulation Resistance : 1000MΩ(MIN.)

Temperature Range : -40°C~+105°C

Unit: mm

Part No.	Dimensions			
	A	B	C	D
3P	8.00	4.00	7.70	7.00
4P	10.00	6.00	7.70	9.00
5P	12.00	8.00	7.70	11.00
6P	14.00	10.00	7.70	13.00
7P	16.00	12.00	7.70	15.00
8P	18.00	14.00	7.70	17.00
9P	20.00	16.00	7.70	19.00
10P	22.00	18.00	7.70	21.00
11P	24.00	20.00	7.70	23.00
12P	26.00	22.00	7.70	25.00
13P	28.00	24.00	7.70	27.00
14P	30.00	26.00	7.70	29.00
15P	32.00	28.00	7.70	31.00

Material	Color	PIN Material
PBT,UL94V-0	Gray	Brass/Gold&Ni-plated

REV.	REVISION RECORD	DATE	UNIT: MM	SIZE: A4	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
					LINEAR	ANGLES			
A0	新图面发行	2017.06.16	MM	A4	0.00±0.15	X° ±3°	APPROVED	黎腾	2017.06.16
					0.00±0.08	X° X'±2°	DESIGNER	肖坤权	2017.06.16
							DRAWN	旷淇	2017.06.16



**康导新能源**  
 网址: www.dgoonne.com 电话: 0769-855377633  
 邮箱: 2860175988@qq.com 传真: 0769-855922827

PART. NO:  
**42014W01-NP\*-A1-\*\***

DWG. NO:  
**ENDE05**

REV: A0 SHEET: 1/1

**TITLE:**  
2.00mm pitch Single Wafer