

环保物料

Specifications:

Voltage Rating : 125V AC/DC

Current Rating : 2A AC,DC


Withstand Voltage : 500V AC/minute

Contact Resistance : 30mΩ(MAX.)

Insulation Resistance : 1000MΩ(MIN.)

Temperature Range : -40°C~+70°C

Unit: mm

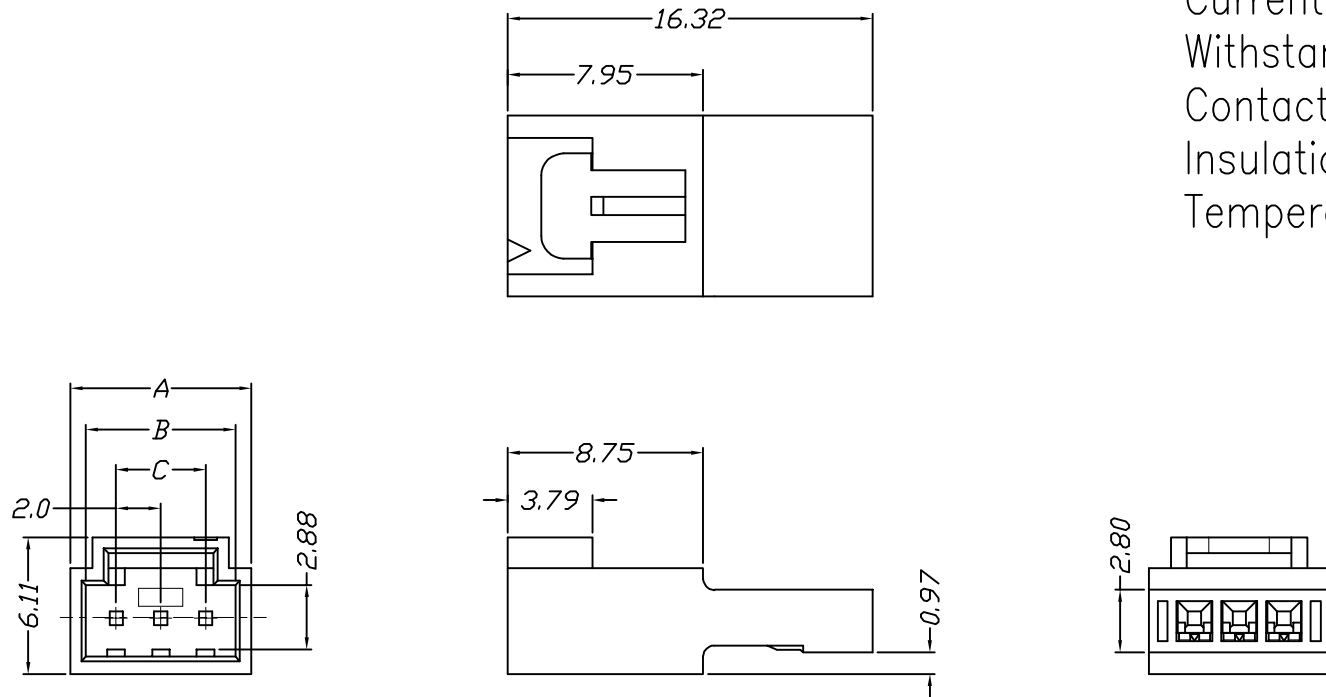

Part No.	Dimensions		
	A	B	C
2P	6.10	4.70	2.00
3P	8.10	6.70	4.00
4P	10.10	8.70	6.00
5P	12.10	10.70	8.00
6P	14.10	12.70	10.00
7P	16.10	14.70	12.00
8P	18.10	16.70	14.00
9P	20.10	18.70	16.00
10P	22.10	20.70	18.00

Material	Color
PBT,UL94V-0	Gray

		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	康导新能源 网址: www.dgonne.com 电话: 0769-8533763 邮箱: 2850175986@qq.com 传真: 0769-8539282	PART NO:
		LINEAR	ANGLES	APPROVED	黎腾	2017.06.16		32011H00-NP*-PT
AO	新图面发行	2017.06.16	UNIT: MM	DESIGNER	肖坤权	2017.06.16	TITLE:	DWG. NO:
REV.	REVISION RECORD	DATE	SIZE: A4	DRAWN	旷淇	2017.06.16	2.00mm pitch Single Housing	ENDE05
			0.0±0.25					REV: AO
			0.00±0.15					SHEET: 1/1
			0.000±0.08					