

环保物料

Specifications:

Voltage Rating : 250V AC/DC



Current Rating : 3A AC,DC

Withstand Voltage : 800V AC/minute

Contact Resistance : 10mΩ(MAX.)

Insulation Resistance : 1000MΩ(MIN.)

Temperature Range : -25°C~+85°C

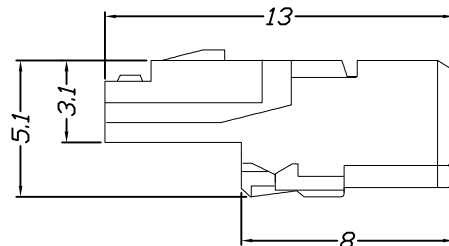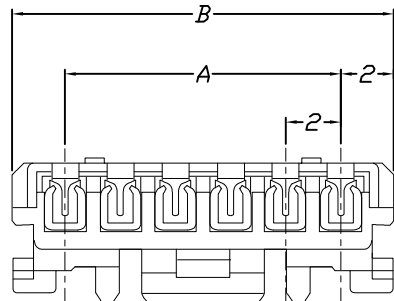

Unit: mm

Part No.	Dimensions		Part No.	Dimensions	
	A	B		A	B
2P	2.00	6.00	10P	18.00	22.00
3P	4.00	8.00	11P	20.00	24.00
4P	6.00	10.00	12P	22.00	26.00
5P	8.00	12.00	13P	24.00	28.00
6P	10.00	14.00	14P	26.00	30.00
7P	12.00	16.00	15P	28.00	32.00
8P	14.00	18.00	16P	30.00	34.00
9P	16.00	20.00			

Material	Color
PA66,UL94V-0	Gray

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
A0	新图面发行	2017.06.16	MM	0.00±0.15	X° ±3°	APPROVED	黎腾	2017.06.16
				0.0±0.25	X° REF±6°	DESIGNER	肖坤权	2017.06.16
				0.000±0.08	X° X'±2°	DRAWN	旷淇	2017.06.16

康导新能源		PART. NO:	32005H00-NP*-66	
<a href="http://www.dgonne.com">www.dgonne.com</a> 电话: 0769-85337833 邮箱: 2850175988@qq.com 传真: 0769-85392827		DWG. NO:	ENDE05	
TITLE:		REV:	A0	SHEET: 1/1
2.00mm pitch Single Housing				