

环保物料

Specifications:

Voltage Rating : 250V AC/DC


Current Rating : 3A AC,DC

Withstand Voltage : 800V AC/minute

Contact Resistance : 10mΩ(MAX.)

Insulation Resistance : 1000MΩ(MIN.)

Temperature Range : -25°C~+85°C

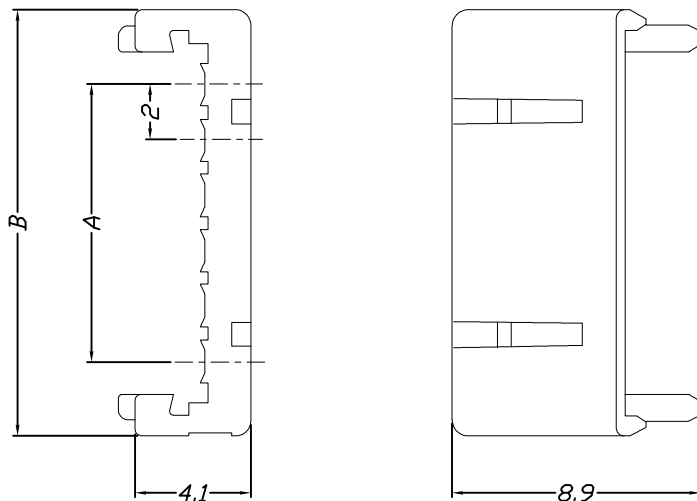

Unit: mm

Part No.	Dimensions		Part No.	Dimensions	
	A	B		A	B
2P	2.00	7.40	9P	16.00	21.40
3P	4.00	9.40	10P	18.00	23.40
4P	6.00	11.40	11P	20.00	25.40
5P	8.00	13.40	12P	22.00	27.40
6P	10.00	15.40	13P	24.00	29.40
7P	12.00	17.40	14P	26.00	31.40
8P	14.00	19.40	15P	28.00	33.40

Material	Color
PA66,UL94V-0	Gray

		GENERAL TOLERANCES		SCALE:	NAME	DATE
		LINEAR	ANGLES	1:1	黎腾	2017.06.16
		0.0±0.25	X° REF±6°	APPROVED	肖坤权	2017.06.16
A0	新图面发行	2017.06.16	UNIT: MM	DESIGNER	旷淇	2017.06.16
REV.	REVISION RECORD	DATE	SIZE: A4	DRAWN		
			0.00±0.15	X° ±3°		
			0.000±0.08	X° X'±2°		



康导新能源

网址: www.dgconne.com 电话: 0769-85337633

邮箱: 2850175999@qq.com 传真: 0769-85392827

PART NO:

32005R00-NP*-66

DWG. NO:

ENDE05

REV: A0 SHEET: 1/1

TITLE: **2.00mm pitch Retainer**