

环保物料

Specifications:

Voltage Rating : 50V AC/DC


Current Rating : 3A AC,DC

Withstand Voltage : 1000V AC/minute

Contact Resistance : 8mΩ(MAX.)

Insulation Resistance : 100MΩ(MIN.)


Temperature Range : -40°C~+100°C

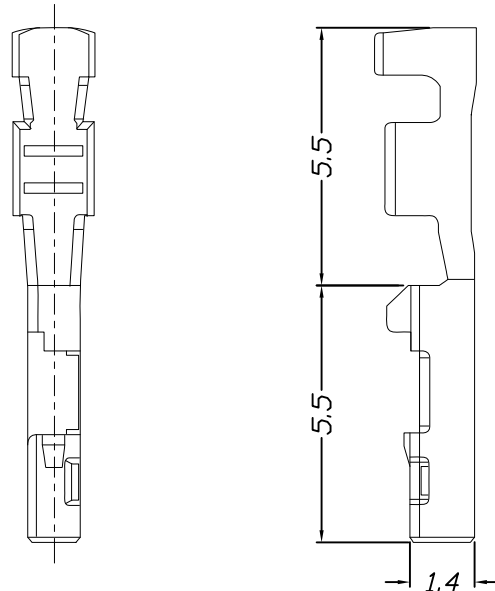

Ordering Information & Specifications

| Part No | Conductor (mm ²) | Insulation O. D. | Material | Finish |
|-------------|------------------------------|------------------|-----------------|----------|
| 42003TOP-** | 0.3 | 1.4 | Phosphor Bronze | Au or Sn |

Unit: mm

| | | | | | | | | | | |
|------|-----------------|------------|----------|--------------------|----------|------------|------|------------|---|--------------------------|
| | | | | GENERAL TOLERANCES | | SCALE: 1:1 | NAME | DATE |  康导新能源 网址: www.dgonne.com 电话: 0769-85337 邮箱: 2850175886@qq.com 传真: 0769-85392 | PART. NO: 42003TOP-** |
| | | | | LINEAR | ANGLES | APPROVED | 黎腾 | 2017.06.16 | | DWG. NO: |
| A0 | 新图面发行 | 2017.06.16 | UNIT: MM | 0.00±0.15 | X° ±3° | DESIGNER | 肖坤权 | 2017.06.16 | TITLE: 2.00mm pitch Crimp Terminal | REV: A0 |
| REV. | REVISION RECORD | DATE | SIZE: A4 | 0.000±0.08 | X° X'±2° | DRAWN | 旷淇 | 2017.06.16 | | SHEET: 1/1 |