

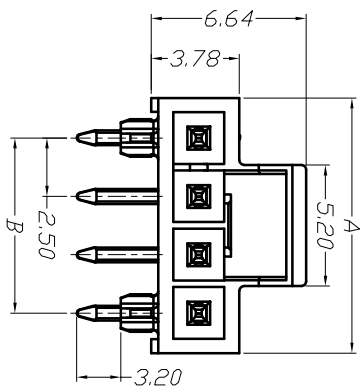

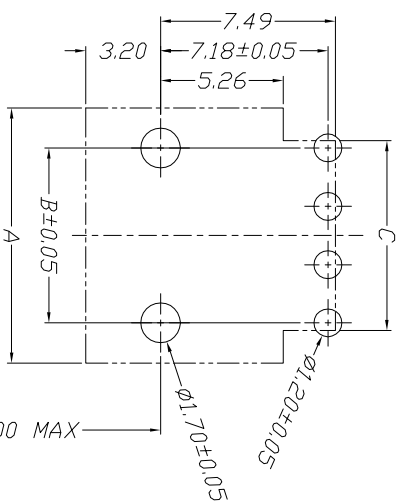
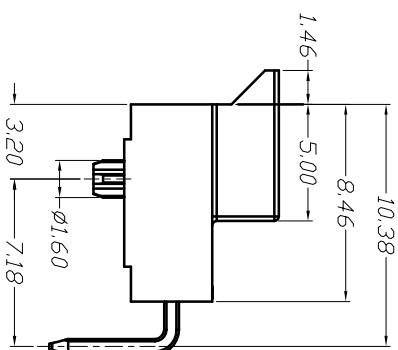


环保物料

42508W90-NP*-A1-**-**

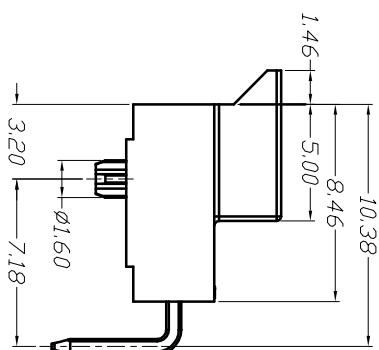

42508W91-NP*-A1-**-**

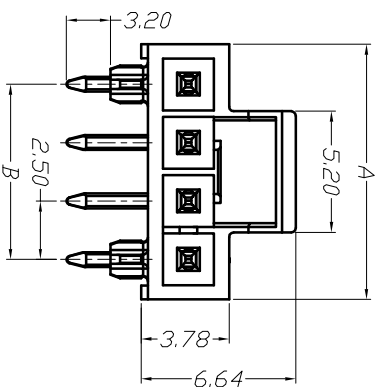

Specifications:
 Voltage Rating : 250V AC/DC
 Current Rating : 3A AC,DC
 Withstand Voltage : 1500V AC/minute
 Contact Resistance : 40mΩ(MAX)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -40°C~+105°C

Poles	Dimensions		
	A	B	C
2P	5.94	2.50	3.14
3P	8.44	5.00	5.64
4P	10.94	7.50	8.14
5P	13.44	10.00	10.64
6P	15.94	12.50	13.14
7P	18.44	15.00	15.64
8P	20.94	17.50	18.14

Material	Color	PIN Material
LCP	Black	Brass

PART. NO.: 42508W9X-NPX-A1-XX
 DWG. NO.:

REV: A0 SHEET: 1/1

GENERAL TOLERANCES

LINEAR: 0.0±0.25

ANGLES: X° REF±6°

SCALE: 1:1

NAME: 黎腾

DATE: 2017.06.16



康导新能源

REV: A0 SHEET: 1/1

UNIT: MM	ANGLE: X° ±3°
0.00±0.15	X° ±2°

APPROVED	DESIGNER
黎腾	肖坤权

DATE	NAME
2017.06.16	肖坤权

TITLE: 2.50mm Pitch 90° Wafer DIP Type

REVISION	DATE	DESCRIPTION
1	2017.06.16	新图面发行
2		REVISION RECORD

H

F

E

D

C

B

A