


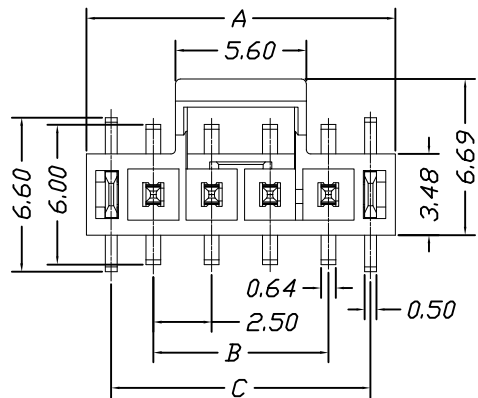


环保物料

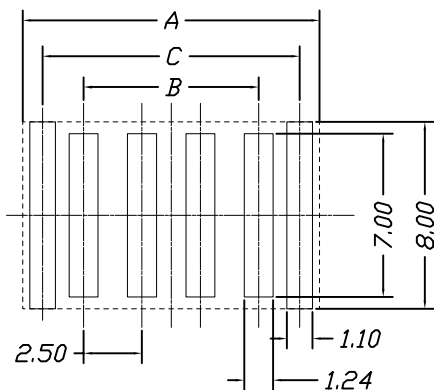


Specifications:
 Voltage Rating : 250V AC/DC
 Current Rating : 3A AC,DC
 Withstand Voltage : 1500V AC/minute
 Contact Resistance : 40mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -40°C~+105°C

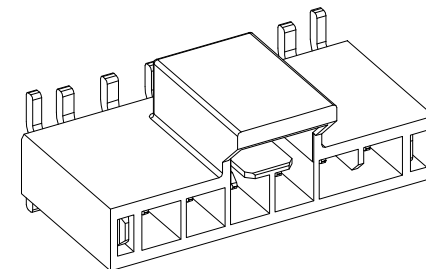

RECOMMENDED PCB LAYOUT(CONNECTOR SIDE VIEW)
 THICKNESS=1.60mm MIN. TOLERANCE: 0.05

Poles	Dimensions		
	A	B	C
2P	8.23	2.50	6.11
3P	10.73	5.00	8.61
4P	13.23	7.50	11.11
5P	15.73	10.00	13.61
6P	18.23	12.50	16.11
7P	20.73	15.00	18.61
8P	23.23	17.50	21.11

Material	Color	PIN Material
LCP	Black	Brass

GENERAL TOLERANCES		SCALE:	NAME	DATE	 康导新能源 网址: www.dgconne.com 电话: 0769-85337833 邮箱: 2850175986@qq.com 传真: 0769-85392827	PART. NO: 42508W00-NPX-A2-XX		
LINEAR	ANGLES	1:1	APPROVED	黎腾			2017.06.16	
0.0±0.25	X° REF±6°		DESIGNER	肖坤权 <td>2017.06.16</td> <th>DWG. NO:</th>			2017.06.16	DWG. NO:
0.00±0.15	X° ±3°		DRAWN	旷淇 <td>2017.06.16</td> <td>REV: A0 SHEET: 1/1</td>			2017.06.16	REV: A0 SHEET: 1/1
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	TITLE: 2.50mm Pitch 180° Wafer SMT Type		