


环保物料

Specifications:

Voltage Rating : 250V AC/DC
 Current Rating : 3A AC,DC
 Withstand Voltage : 1000V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 1000V DC/500MΩ(MIN.)
 Temperature Range : -25°C~+85°C

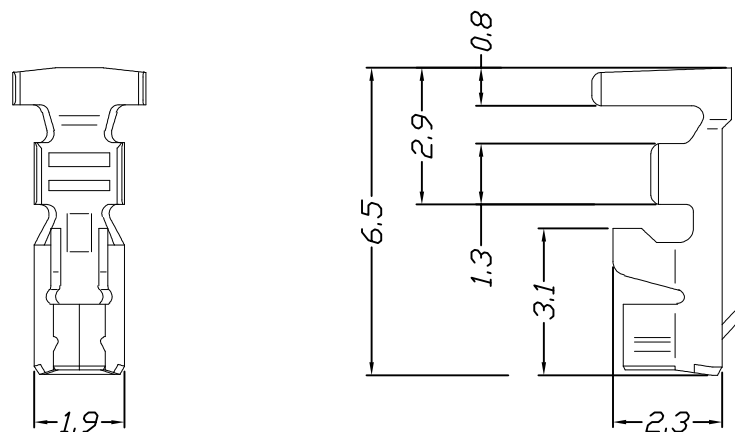

Part No	Wire Range	Insulation O. D.	Material	Finish
42504TOP-**	AWG#24 -#20	1.5mm-1.9mm (1.9mm max)	Phosphor Bronze	Au or Sn
42504T1P-**	AWG#28 -#22	0.8mm-1.9mm (1.9mm max)	Phosphor Bronze	Au or Sn

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	康导新能源 网址: www.dgonne.com 电话: 0769-85337633 邮箱: 2850175986@qq.com 传真: 0769-85392827	PART. NO: 42504T*P-**		
				LINEAR	ANGLES					DWG. NO:	ENDE05	
AO	新图面发行	2018. 7. 28	UNIT: MM	0.00±0.25	X° ±3°	APPROVED			康导新能源 网址: www.dgonne.com 电话: 0769-85337633 邮箱: 2850175986@qq.com 传真: 0769-85392827	DWG. NO: ENDE05		
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°	DESIGNER	肖坤权	2018. 7. 28		TITLE: 2.50mm pitch Crimp Terminal	REV: AO	SHEET: 1/1