



环保物料

Specifications:

Voltage Rating : 250V AC/DC
 Current Rating : 3A AC,DC
 Withstand Voltage : 1000V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 1000V DC/1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C

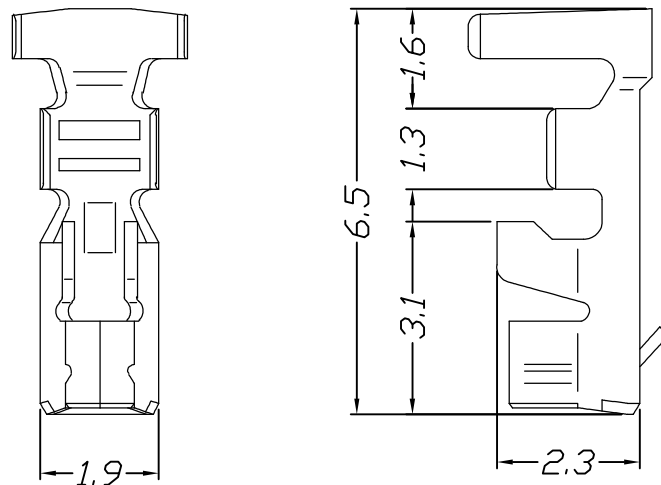

Part No	Wire Range	Insulation O. D.	Material	Finish
42502T 0P-**-#20	AWG#24 -#20	1.5mm-1.9mm (1.9mm max)	Phosphor Bronze	Au or Sn
42502T 1P-**-#22	AWG#28 -#22	0.8mm-1.9mm (1.9mm max)	Phosphor Bronze	Au or Sn
42502T 2P-**-#22	AWG#26 -#22	1.3mm-1.7mm (1.7mm max)	Phosphor Bronze	Au or Sn

		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 康导新能源 网址: www.dgoonne.com 电话: 0769-85337633 邮箱: 2850175986@qq.com 传真: 0769-85392827	PART. NO: 42502T*P-**-				
		<table border="1"> <tr> <th>LINEAR</th> <th>ANGLES</th> </tr> <tr> <td>0.0±0.35</td> <td>X° REF±6°</td> </tr> </table>		LINEAR	ANGLES	0.0±0.35		X° REF±6°	APPROVED			DWG. NO: ENDE05
LINEAR	ANGLES											
0.0±0.35	X° REF±6°											
AO	新图面发行	2018.7.28	UNIT: MM	0.00±0.25	X° ±3°	DESIGNER			TITLE: 2.50mm pitch Crimp Terminal			
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°	DRAWN	肖坤权	2018.7.28	REV: AO SHEET: 1/1			