

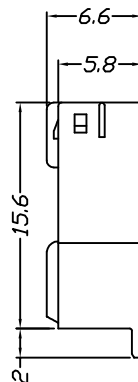
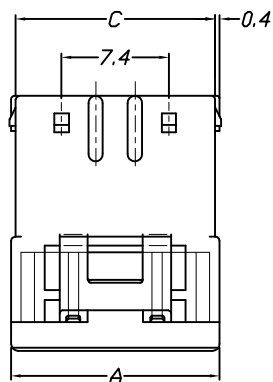


环保物料



Specifications:

Voltage Rating : 125V AC/DC

Current Rating : 2A AC,DC

Withstand Voltage : 1250V AC/minute

Contact Resistance : 40mΩ(MAX.)

Insulation Resistance : 1000MΩ(MIN.)

Temperature Range : -40°C~+105°C

Unit: mm

Part No.	Dimensions			
	A	B	C	D
2P	6.40	2.00	5.80	6.40
3P	8.40	4.00	7.80	7.70
4P	10.40	6.00	9.80	7.70
5P	12.40	8.00	11.80	7.70
6P	14.40	10.00	13.80	7.70
7P	16.40	12.00	15.80	7.70
8P	18.40	14.00	17.80	7.70
9P	20.40	16.00	19.80	7.70
10P	22.40	18.00	21.80	7.70
11P	24.40	20.00	23.80	7.70
12P	26.40	22.00	25.80	7.70
13P	28.40	24.00	27.80	7.70
14P	30.40	26.00	29.80	7.70
15P	32.40	28.00	31.80	7.70

Material	Color
PBT,UL94V-0	Gray

REV.	REVISION RECORD	DATE	SIZE: A4	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
A0	新图面发行	2017.06.16	UNIT: MM	0.00±0.15	X° ±3°	APPROVED	黎腾	2017.06.16
				0.00±0.08	X° X'±2°	DESIGNER	肖坤权	2017.06.16
						DRAWN	旷淇	2017.06.16

康导新能源

网址: www.dgoorne.com 电话: 0769-85377633

邮箱: 2860175988@qq.com 传真: 0769-853922627

PART. NO:
32014H00-NP*-PT

DWG. NO:
ENDE05

REV: A0 SHEET: 1/1

TITLE:
2.00mm pitch Single Housing