

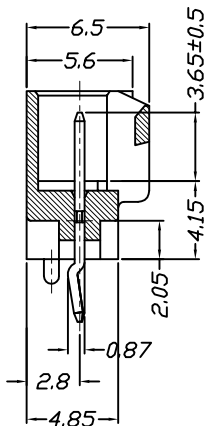
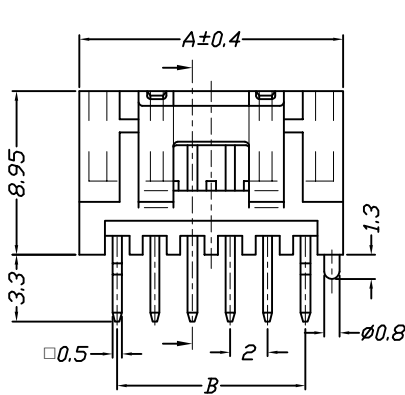


环保物料



SECT. X-X



Specifications:

Voltage Rating : 125V AC/DC

Current Rating : 2A AC,DC

Withstand Voltage : 1250V AC/minute


Contact Resistance : 40mΩ(MAX.)

Insulation Resistance : 1000MΩ(MIN.)

Temperature Range : -40°C~+105°C

Unit: mm

Part No.	Dimensions			
	A	B	C	D
3P	8.00	4.00	7.70	7.00
4P	10.00	6.00	7.70	9.00
5P	12.00	8.00	7.70	11.00
6P	14.00	10.00	7.70	13.00
7P	16.00	12.00	7.70	15.00
8P	18.00	14.00	7.70	17.00
9P	20.00	16.00	7.70	19.00
10P	22.00	18.00	7.70	21.00
11P	24.00	20.00	7.70	23.00
12P	26.00	22.00	7.70	25.00
13P	28.00	24.00	7.70	27.00
14P	30.00	26.00	7.70	29.00
15P	32.00	28.00	7.70	31.00



P.C.B. LAYOUT

Material	Color	PIN Material
PBT,UL94V-0	Gray	Brass/Gold&Ni-plated

		GENERAL TOLERANCES		SCALE:	NAME	DATE	<p>康导新能源</p> <p>网址: www.dgoonne.com 电话: 0769-853377633</p> <p>邮箱: 2860175966@qq.com 传真: 0769-853622627</p>	PART. NO:		
		LINEAR	ANGLES	1:1	APPROVED	黎腾		2017.06.16	42014W00-NP*-A1-**	
A0	新图面发行	2017.06.16	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER		肖坤权	2017.06.16	DWG. NO:
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN		旷淇	2017.06.16	ENDE05
						TITLE:		REV: A0	SHEET: 1/1	
						2.00mm pitch Single Wafer				