


环保物料

Specifications:
 Voltage Rating : 100V AC/DC
 Current Rating : 3A AC,DC
 Withstand Voltage : 800V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C

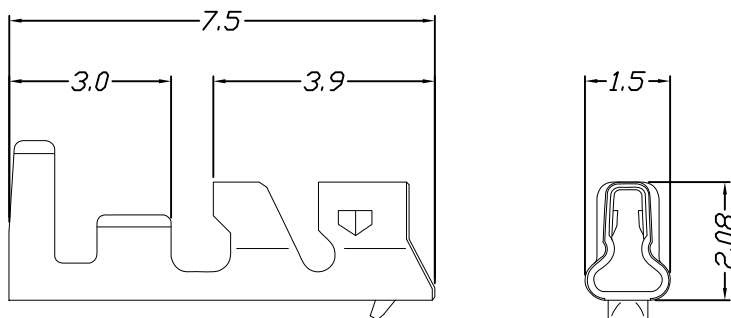

Ordering Information & Specifications

| Part No | Wire Range | Insulation O. D. | Material | Finish |
|------------------|----------------|----------------------------|--------------------|----------|
| 42001T OP-001 | AWG#28 -#24 | 1.0mm-1.5mm (1.5mm max) | Phosphor Bronze | Au or Sn |

Unit: mm

| | | | | | | | | | | | |
|------|-----------------|---|----------|--------------------|-----------|---------------------------------------|------|------------|--|--------------------------|--|
| | | | | GENERAL TOLERANCES | | SCALE: 1:1 | NAME | DATE |  <p>康导新能源 网址: www.dgoonne.com 电话: 0760-85337633 邮箱: 2950175986@qq.com 传真: 0760-85392827</p> | PART. NO: 42002TOP-** | |
| | |  | | LINEAR | ANGLES | APPROVED | 黎腾 | 2017.06.16 | | DWG. NO: | |
| | | | | 0.0±0.25 | X° REF±6° | DESIGNER | 肖坤权 | 2017.06.16 | | REV: A0 | |
| A0 | 新图面发行 | 2017.06.16 | UNIT: MM | 0.00±0.15 | X° ±3° | DRAWN | 旷淇 | 2017.06.16 | | SHEET: 1/1 | |
| REV. | REVISION RECORD | DATE | SIZE: A4 | 0.000±0.08 | X° X'±2° | TITLE: 2.00mm pitch Crimp Terminal | | | | | |