
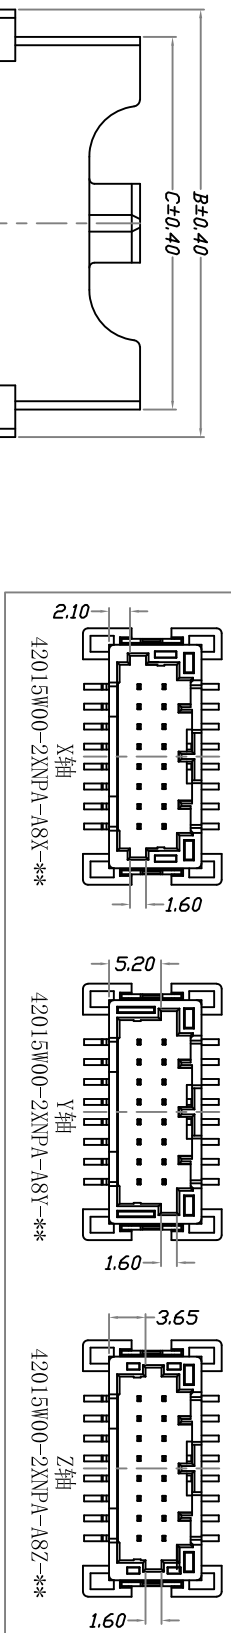
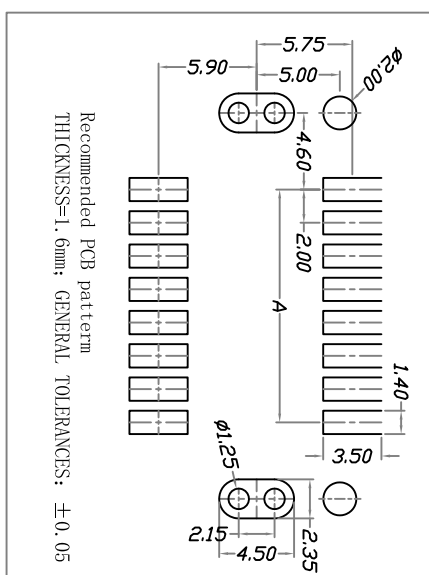


环保物料

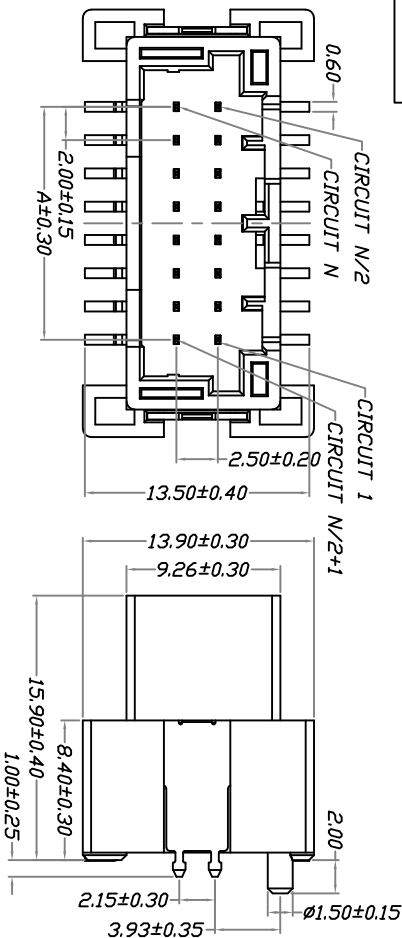

Specifications:
Voltage Rating : 50V AC/DC
Current Rating : 3.0A AC,DC(MIN.)
Withstand Voltage : 500V AC/minute
Contact Resistance : 20mΩ(MAX.)
Insulation Resistance : 50MΩ(MIN.)
Temperature Range : -40℃~+125℃

Circuits		Dimensions		
Port No		C	B	A
2*20P	48.40	49.70	38.00	
2*18P	44.40	45.70	34.00	
2*16P	40.40	41.70	30.00	
2*14P	36.40	37.70	26.00	
2*12P	32.40	33.70	22.00	
2*10P	28.40	29.70	18.00	
2*8P	22.40	25.70	14.00	
2*6P	18.40	21.70	10.00	
2*4P	14.40	17.70	6.00	
2*2P	10.40	13.70		

Port No.	Material	Color	PIN Material
42015W00-2XNPA-A8*-**	PPS,UL94V-0	BLACK	High conductivity copper

康导新能源
地址: www.4goonne.com 电话: 0780-88387783
邮编: 280017 邮箱: 4goonne@qq.com 传真: 0780-88382382

										PART. NO.: 42015H00-2XNPA-A8-**-												
							GENERAL TOLERANCES			SCALE: 1:1		NAME 黎腾		DATE 2017. 06. 16		 康道新能源 网址: www.gdgcma.com 电话: 0769-86393763 QQ: 286017696@qq.com 微信: 0769-86392262						
					LINEAR		ANGLES		APPROVED		DESIGNER		DRAWN		TITLE: 2.0mm pitch Dual Wafer					DWG. NO.: END05		
A0			新图面发行		2017. 06. 16		0.00±0.15		X° ±3°				肖坤权		2017. 06. 16							
REV.			REVISION RECORD		DATE		SIZE: A4		0.000±0.08		X° X'±2°		叶淇		2017. 06. 16							
1			2		3		4		5		6		7		8							