
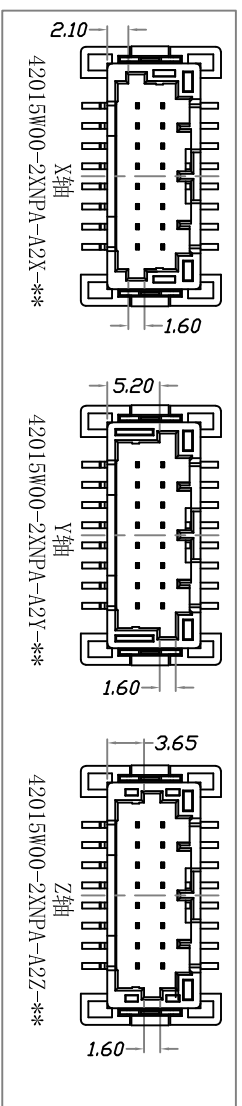


88

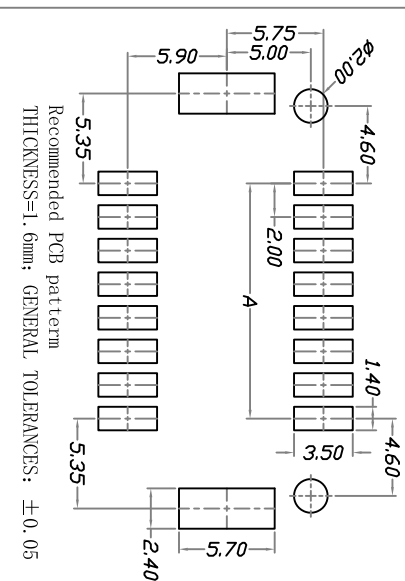

Specifications:
Voltage Rating : 50V AC/DC
Current Rating : 3.0A AC,DC(MIN.)
Withstand Voltage : 500V AC/minute
Contact Resistance : 20mΩ(MAX.)
Insulation Resistance : 50MΩ(MIN.)
Temperature Range : -40°C~+125°C

Circuits	Dimensions		
	C	B	A
2*20P	44.40	49.70	38.00mm
2*18P	45.40	45.70	34.00mm
2*16P	40.40	41.70	30.00mm
2*14P	36.40	37.70	26.00mm
2*12P	32.40	33.70	22.00mm
2*10P	28.40	29.70	18.00mm
2*8P	22.40	25.70	14.00mm
2*6P	18.40	21.70	10.00mm
2*4P	14.40	17.70	6.00mm
2*2P	10.40	13.70	2.00mm

Part No.	Material	Color	PIN Material
42015W00-2XNPA-A2*-**	PPS, UL94V-0	BLACK	High conductivity copper

GENERAL TOLERANCES

SCALE:

NAME	DATE
------	------

冊四第卷

PART NO.:

康昇新能源

PART. NO:	42015W00-2XNPA-A2*-**
DWG. NO.	

A0	新图面发行	2017.06.16	UNIT: MM	0.00 ± 0.15	$X^\circ \pm 3^\circ$	肖坤权
REV.	REVISION RECORD	DATE	SIZE: A4	0.000 ± 0.08	$X^\circ \pm 2^\circ$	邱 淇
						2017.06.16

TITLE:
2.0mm pitch Dual Wafer

PROJ. NO.: ENDE05	
REV: A0	SHEET: 1/1