
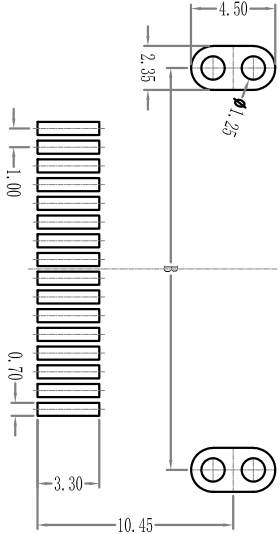
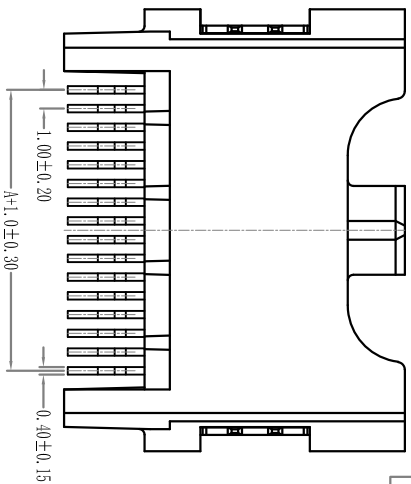
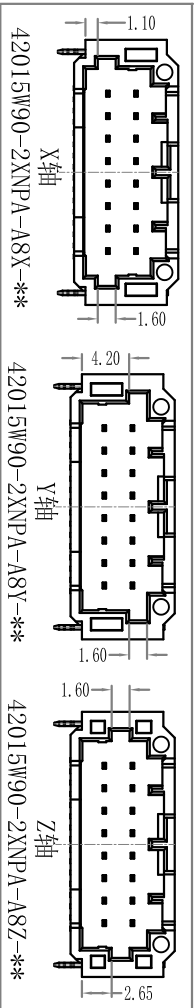
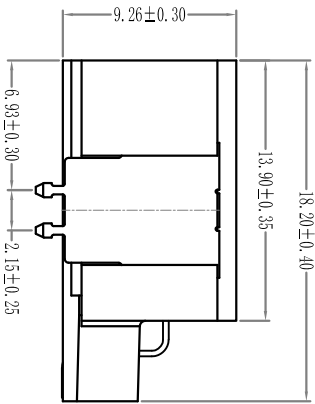


环保物料

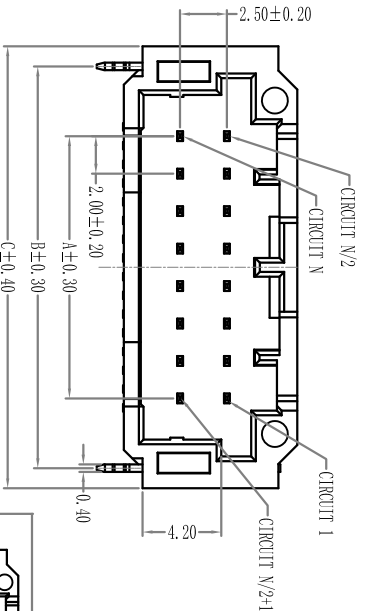

Recommended PCB pattern
THICKNESS=1.6mm; GENERAL TOLERANCES: ±0.05

Part No.	Material	Color	PIN Material
42015W90-2XNPA-A8*-**	PPS,UL94V-0	BLACK	High conductivity copper

GENERAL TOLERANCES				SCALE:				TITLE:			
LINEAR		ANGLES		APPROVED		DESIGNER		DRAWN		REV:	
0.0±0.25		X° REF±6°		黎腾		肖坤权		2.00mm pitch Dual Wafer		END05	
X° ±3°		X° ±3°		2017.06.16		2017.06.16		REV: A0		SHEET: 1/1	
X° X° ±2°		X° X° ±2°		2017.06.16		2017.06.16		REV: A0		SHEET: 1/1	
0.000±0.08		0.000±0.08		0.000±0.08		0.000±0.08		0.000±0.08		0.000±0.08	
SIZE: A4		DATE		DATE		DATE		DATE		DATE	
2017.06.16		2017.06.16		2017.06.16		2017.06.16		2017.06.16		2017.06.16	
REVISION RECORD		REVISION RECORD		REVISION RECORD		REVISION RECORD		REVISION RECORD		REVISION RECORD	
2		2		2		2		2		2	
1		1		1		1		1		1	

Specifications:
Voltage Rating : 50V AC/DC
Current Rating : 3.0A AC,DC(MIN.)
Withstand Voltage : 500V AC/minute
Contact Resistance : 20mΩ(MAX.)
Insulation Resistance : 50MΩ(MIN.)
Temperature Range : -40℃~+125℃

Circuits		Dimensions		
Part No	A	B	C	
2*20P	38.00	45.45	47.60	
2*18P	34.00	41.45	43.60	
2*16P	30.00	37.45	39.60	
2*14P	26.00	33.45	35.60	
2*12P	22.00	29.45	31.60	
2*10P	18.00	25.45	27.60	
2*8P	14.00	21.45	23.60	
2*6P	10.00	17.45	19.60	
2*4P	6.00	13.45	15.60	
2*2P	2.00	9.45	11.60	