

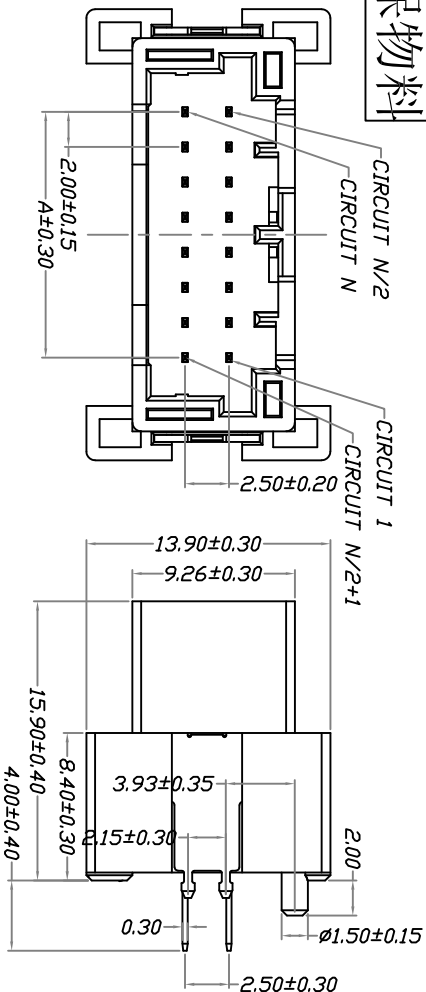
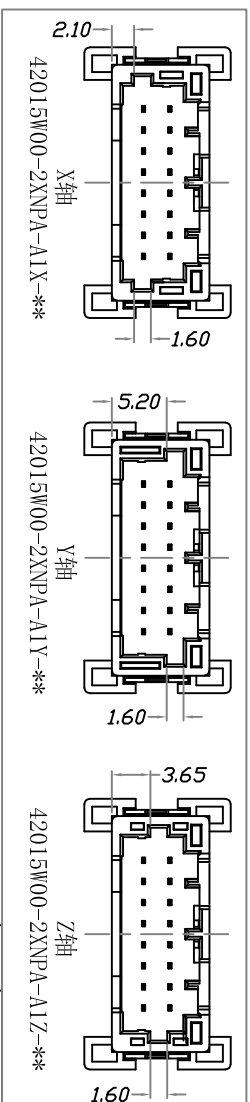


环保物料

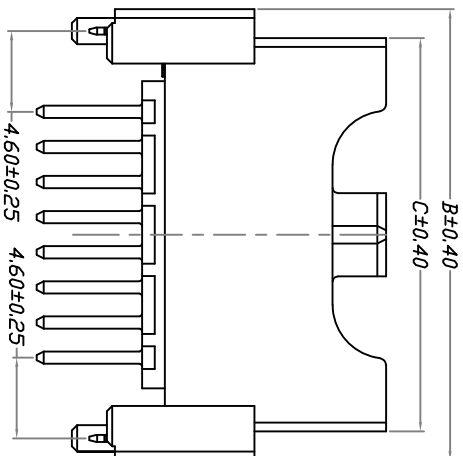

Recommended PCB pattern
THICKNESS=1.6mm; GENERAL TOLERANCES: ±0.05

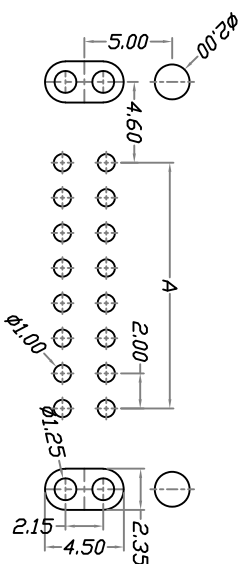

Specifications:
Voltage Rating : 50V AC/DC
Current Rating : 3.0A AC,DC(MIN.)
Withstand Voltage : 500V AC/minute
Contact Resistance : 20mΩ(MAX.)
Insulation Resistance : 50MΩ(MIN.)
Temperature Range : -40°C~+125°C

Part No	Dimensions			
	C	B	A	
2*20P	48.40	49.70	38.00	
2*18P	44.40	45.70	34.00	
2*16P	40.40	41.70	30.00	
2*14P	36.40	37.70	26.00	
2*12P	32.40	33.70	22.00	
2*10P	28.40	29.70	18.00	
2*8P	22.40	23.70	14.00	
2*6P	18.40	21.70	10.00	
2*4P	14.40	17.70	6.00	
2*2P	10.40	13.70		

Part No.	Material	Color	PIN Material
42015W00-2XNPA-A1*-**	PPS,UL94V-0	BLACK	High conductivity copper

GENERAL TOLERANCES

SCALE: 1:1

LINEAR	ANGLES
0.0±0.25	X° REF±6°
0.00±0.15	X° ±3°
0.000±0.08	X° X'±2°



康导新能源
网址: www.kdsource.com
地址: 280017686@qq.com
电话: 0780-68387763
传真: 0780-68382322

PART. NO: 42015W00-2XNPA-A1*-**

DWG. NO:

ENDE05

REV: A0 SHEET: 1/1

新图面发行

REVISION RECORD

DATE

SIZE: A4

0.000±0.08

X° X'±2°

DRAWN

尹淇

2017.06.16

2017.06.16

2017.06.16

2017.06.16

2017.06.16

2017.06.16

2017.06.16

2017.06.16

2017.06.16