



3

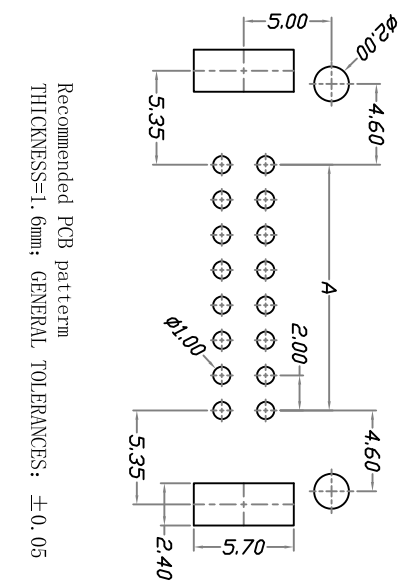

Recommended PCB pattern
THICKNESS=1.6mm; GENERAL TOLERANCES: ± 0.05

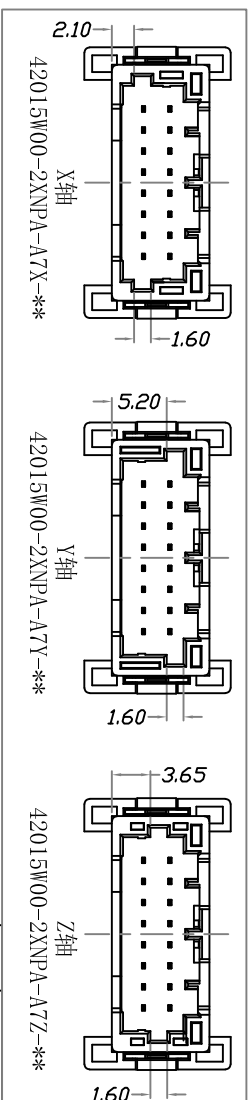

Specifications:

- Voltage Rating : 50V AC/DC
- Current Rating : 3.0A AC,DC(MIN.)
- Withstand Voltage : 500V AC/minute
- Contact Resistance : 20mΩ(MAX.)
- Insulation Resistance : 50MΩ(MIN.)
- Temperature Range : -40°C~+125°C

Circuits	Dimensions		
	C	B	A
2*0P	48.40	49.70	36.000
2*8P	44.40	45.70	34.000
2*6P	40.40	41.70	30.000
2*4P	36.40	37.70	26.000
2*2P	32.40	33.70	22.000
2*8P	28.40	29.70	18.000
2*6P	24.40	25.70	14.000
2*4P	18.40	21.70	10.000
2*2P	14.40	17.70	6.000

Part No.	Material	Color	PIN Material
42015W00-2XNPA-A7*-**	PPS,UL94V-0	BLACK	High conductivity copper

GENERAL TOLERANCES

SCALE:
1:1

NAME	DATE
------	------



康 昇 新 能 源

PART. NO:

LINEAR	ANGLE
0.0 ± 0.25	X° REF =

1:1	APPROVED	0
-----	----------	---

黎騰	2017. 06. 16

TITLE:

2.00mm pitch Dual Wafer

42015W00-2XNPA-A7*-**
DWG. NO.:

$.00 \pm 0.15$	$X^\circ \pm 3$
000 ± 0.08	$X^\circ X' \pm$

DESIGNER	
DRAWN	

肖坤权	2017.06.16
旷淇	2017.06.16

3