

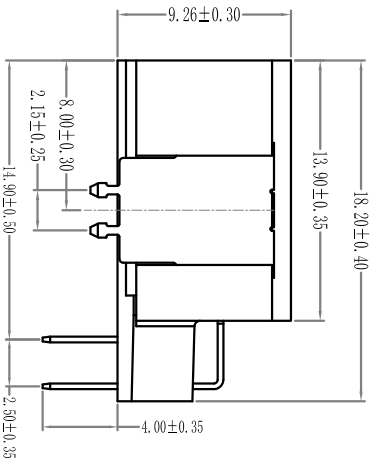
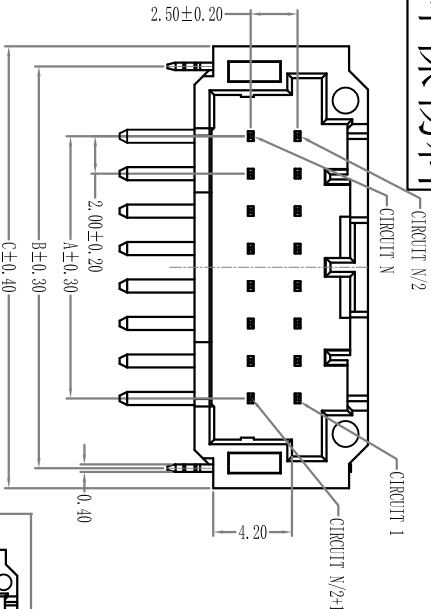



环保物料





Specifications:
Voltage Rating : 50V AC/DC
Current Rating : 3.0A AC,DC(MIN.)
Withstand Voltage : 500V AC/minute
Contact Resistance : 20mΩ(MAX.)
Insulation Resistance : 50MΩ(MIN.)
Temperature Range : -40°C~+125°C



42015W90-2XNPA-A1X-***

42015W90-2XNPA-A1Y-***

42015W90-2XNPA-A1Z-***

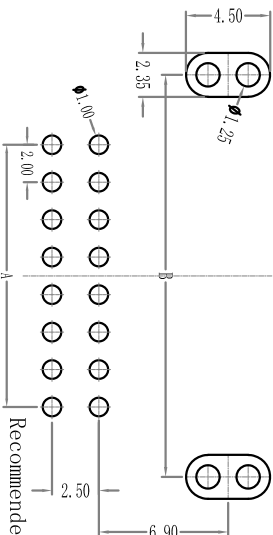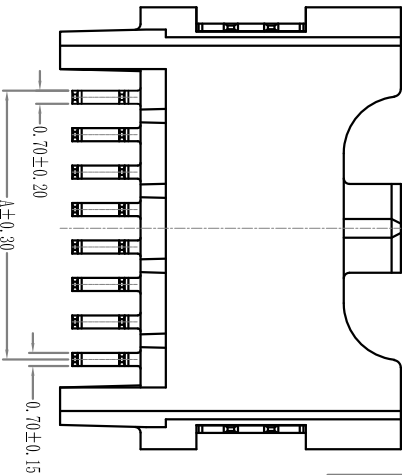

Part No	Dimensions		
	A	B	C
2*20P	38.00	45.45	47.60
2*18P	34.00	41.45	43.60
2*16P	30.00	37.45	39.60
2*14P	26.00	33.45	35.60
2*12P	22.00	29.45	31.60
2*10P	18.00	25.45	27.60
2*8P	14.00	21.45	23.60
2*6P	10.00	17.45	19.60
2*4P	6.00	13.45	15.60
2*2P	2.00	9.45	11.60

Part No.	Material	Color	PIN Material
42015W90-2XNPA-A1*-**	PPS,UI94V-0	BLACK	High conductivity copper

GENERAL TOLERANCES

SCALE: 1:1

NAME

DATE

LINEAR

ANGLES

APPROVED

DESIGNER

DRAWN



康导新能源

网址: www.kdnew.com 电话: 0790-86837888
地址: 230017688@qq.com 传真: 0790-8682627

TITLE:

2.00mm pitch Dual Wafer

PART. NO:	DWG. NO:	REV:	SHEET:
42015W90-2XNPA-A1*-**	ENDE05	A0	1/1