

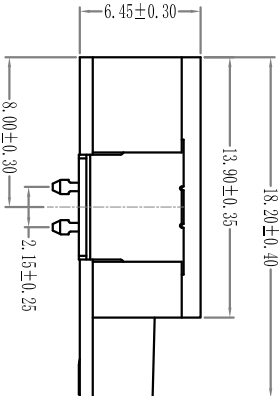



环保物料

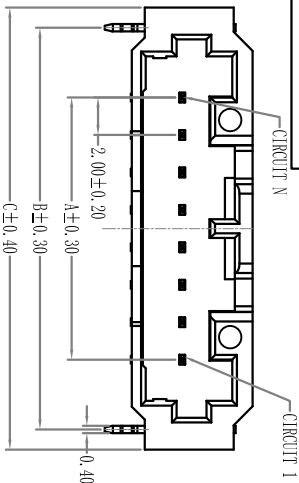



Specifications:
Voltage Rating : 50V AC/DC
Current Rating : 3.0A AC,DC(MIN.)
Withstand Voltage : 500V AC/minute
Contact Resistance : 20mΩ(MAX.)
Insulation Resistance : 50MΩ(MIN.)
Temperature Range : -40°C~+125°C

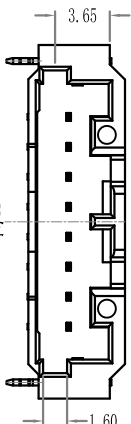

42015W90-NPA-A8X-**-X轴

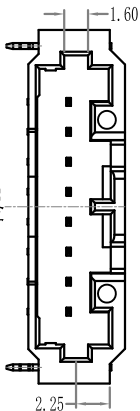

42015W90-NPA-A8X-**-Y轴

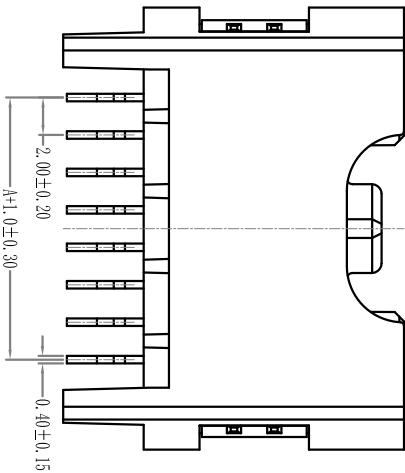

Recommended PCB pattern
THICKNESS=1.6mm; GENERAL TOLERANCES: ±0.05

Circuits	Dimensions		
	Part No	A	B C
20P	38.00	45.45	47.60
18P	34.00	41.45	43.60
16P	30.00	37.45	39.60
14P	26.00	33.45	35.60
12P	22.00	29.45	31.60
10P	18.00	25.45	27.60
8P	14.00	21.45	23.60
6P	10.00	17.45	19.60
4P	6.00	13.45	15.60
2P	2.00	9.45	11.60

Part No.	Material	Color	PIN Material
42015W90-NPA-A8*-**	PPS,UI94V-0	BLACK	High conductivity copper

GENERAL TOLERANCES	
LINEAR	ANGLES

0.0±0.25	X° REF±6°
----------	-----------

SCALE:	
1:1	APPROVED

0.0±0.25	X° REF±6°
----------	-----------

康导新能源
www.kgcnm.com 电话: 0790-86377838
地址: 230017688@qq.com 传真: 0790-8632627

PART. NO:	
42015W90-NPA-A8*-**	

DWG. NO:	
ENDE05	

REV.	DATE	SIZE:	UNIT:	MM	0.00±0.15	X°	REF±6°	DESIGNER	DATE	2017.06.16	TITLE:	2.00mm pitch Single Wafer
1	2017.06.16	A4	0.000±0.08	X°	X°±2°	0.00±0.15	X°	REF±6°	肖坤权	2017.06.16		

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---