

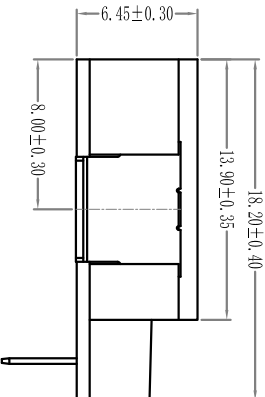



环保物料

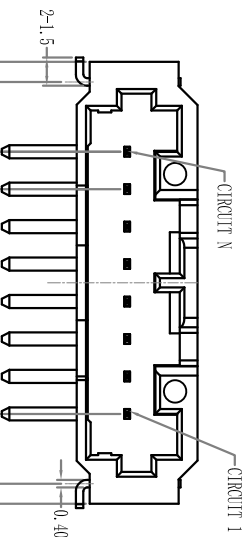


Specifications:
Voltage Rating : 50V AC/DC
Current Rating : 3.0A AC,DC(MIN.)
Withstand Voltage : 500V AC/minute
Contact Resistance : 20mΩ(MAX.)
Insulation Resistance : 50MΩ(MIN.)
Temperature Range : -40°C~+125°C

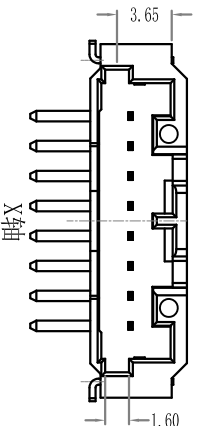

42015W90-NPA-A7X-**-X轴

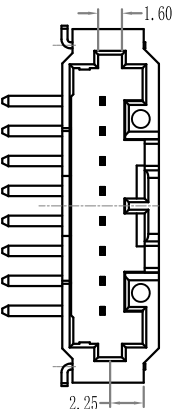

42015W90-NPA-A7X-**-Y轴

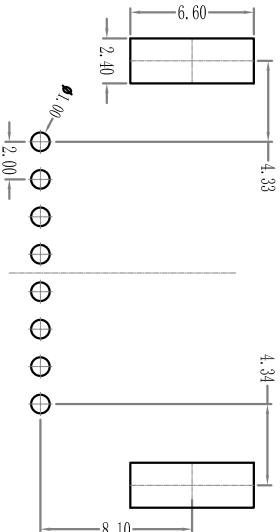

Recommended PCB pattern
THICKNESS=1.6mm; GENERAL TOLERANCES: ±0.05

Circuits	Dimensions		
	A	B	C
Part No			
20P	38.00	45.45	47.60
18P	34.00	41.45	43.60
16P	30.00	37.45	39.60
14P	26.00	33.45	35.60
12P	22.00	29.45	31.60
10P	18.00	25.45	27.60
8P	14.00	21.45	23.60
6P	10.00	17.45	19.60
4P	6.00	13.45	15.60
2P		9.45	11.60

Part No.	Material	Color	High conductivity copper
42015W90-NPA-A7*-**	PPS,UI94V-0	BLACK	

SCALE: 1:1

康导新能源

康导新能源
www.kgdnew.com
地址: 28017888@qq.com
电话: 0799-88337838
传真: 0799-88326267

PART. NO:
42015W90-NPA-A7*-**

DWG. NO:

ENDE05

REV: A0 SHEET: 1/1

GENERAL TOLERANCES

LINEAR ANGLES
0.0±0.25 X° REF±6°
DISIGNER 肖坤权

DATE 2017.06.16

DATE 2017.06.16

REV: A0

1 2 3 4 5 6 7 8