

环保物料

1

2

3

4

5




6

7


8

Specifications:



Voltage Rating : 50V AC/DC
Current Rating : 3.0A AC,DC(MIN.)
Withstand Voltage : 500V AC/minute
Contact Resistance : 20mΩ(MAX.)
Insulation Resistance : 50MΩ(MIN.)
Temperature Range : -40℃~+125℃

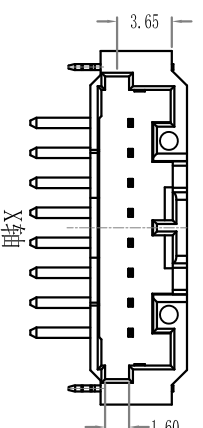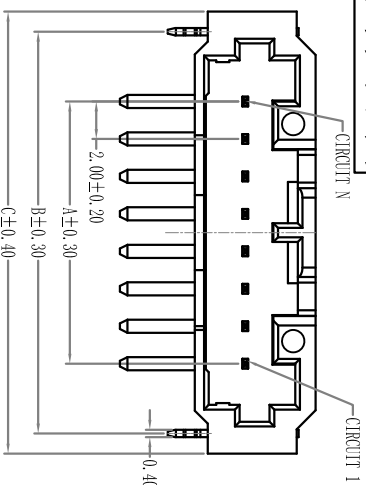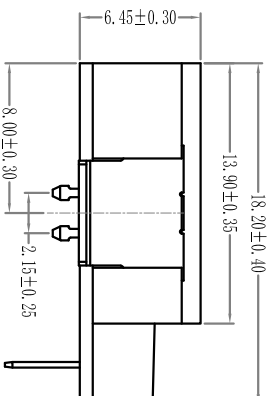

42015W90-NPA-A2X-**

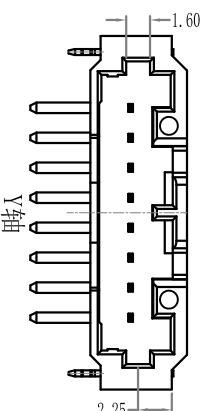

42015W90-NPA-A2X-**

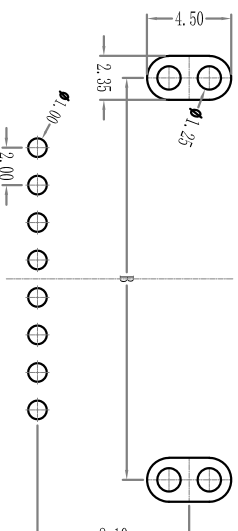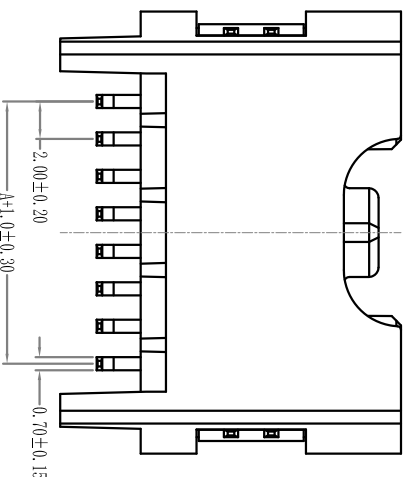

Recommended PCB pattern
THICKNESS=1.6mm; GENERAL TOLERANCES: ±0.05

Circuits	Dimensions		
	A	B	C
20P	38.00	45.45	47.60
18P	34.00	41.45	43.60
16P	30.00	37.45	39.60
14P	26.00	33.45	35.60
12P	22.00	29.45	31.60
10P	18.00	25.45	27.60
8P	14.00	21.45	23.60
6P	10.00	17.45	19.60
4P	6.00	13.45	15.60
2P	—	9.45	11.60

PIN Material

High conductivity copper

Part No.

42015W90-NPA-A2*-**

Material

PPS,UI94V-0

Color

BLACK

SCALE:

1:1

NAME

DATE

TITLE:

2.00mm pitch Single Wafer

REV:

A0

SHEET: 1/1

DWG. NO:

END05

PART. NO:

42015W90-NPA-A2*-**

PIN Material

High conductivity copper

GENERAL TOLERANCES

LINEAR

ANGLES

APPROVED

DESIGNER

肖坤权

2017.06.16

黎腾

2017.06.16

0.0±0.25

X° REF±6°

X° ±3°

SIZE: A4

0.000±0.08

X° X'±2°

DATE

2017.06.16

UNIT: MM

0.00±0.15

0.00±0.15

0.00±0.08

X° X'±2°

DATE

2017.06.16

0.00±0.15

0.00±0.08

X° X'±2°

DATE

2017.06.16

UNIT: MM

0.00±0.15

0.00±0.08

0.00±0.08

X° X'±2°

DATE

2017.06.16

0.00±0.15

0.00±0.08

X° X'±2°

DATE

2017.06.16

UNIT: MM

0.00±0.15

0.00±0.08

0.00±0.08

X° X'±2°

DATE

2017.06.16

0.00±0.15

0.00±0.08

X° X'±2°

DATE

2017.06.16

UNIT: MM

0.00±0.15

0.00±0.08

0.00±0.08

X° X'±2°

DATE

2017.06.16

0.00±0.15

0.00±0.08

X° X'±2°

DATE

2017.06.16

UNIT: MM

0.00±0.15

0.00±0.08

0.00±0.08

X° X'±2°

DATE

2017.06.16

0.00±0.15

0.00±0.08

X° X'±2°

DATE

2017.06.16

UNIT: MM

0.00±0.15

0.00±0.08

0.00±0.08

X° X'±2°

DATE

2017.06.16

0.00±0.15

0.00±0.08

X° X'±2°

DATE

2017.06.16

UNIT: MM

0.00±0.15

0.00±0.08

0.00±0.08

X° X'±2°

DATE

2017.06.16

0.00±0.15

0.00±0.08

X° X'±2°

DATE

2017.06.16

UNIT: MM

0.00±0.15

0.00±0.08

0.00±0.08

X° X'±2°

DATE

2017.06.16

0.00±0.15

0.00±0.08

X° X'±2°

DATE

2017.06.16

UNIT: MM

0.00±0.15

0.00±0.08

0.00±0.08

X° X'±2°

DATE

2017.06.16

0.00±0.15

0.00±0.08

X° X'±2°

DATE

2017.06.16

UNIT: MM

0.00±0.15

0.00±0.08

0.00±0.08

X° X'±2°

DATE

2017.06.16

0.00±0.15

0.00±0.08

X° X'±2°

DATE

2017.06.16

UNIT: MM

0.00±0.15

0.00±0.08

0.00±0.08

X° X'±2°

DATE

2017.06.16

0.00±0.15

0.00±0.08

X° X'±2°

DATE

2017.06.16

UNIT: MM

0.00±0.15

0.00±0.08

0.00±0.08

X° X'±2°

DATE

2017.06.16

0.00±0.15

0.00±0.08

X° X'±2°

DATE

2017.06.16

UNIT: MM

0.00±0.15

0.00±0.08

0.00±0.08

X° X'±2°

DATE

2017.06.16

0.00±0.15

0.00±0.08

X° X'±2°

DATE

2017.06.16

UNIT: MM

0.00±0.15

0.00±0.08

0.00±0.08

X° X'±2°

DATE

2017.06.16

0.00±0.15

0.00±0.08

X° X'±2°

DATE

2017.06.16

UNIT: MM

0.00±0.15

0.00±0.08

0.00±0.08

X° X'±2°

DATE

2017.06.16

0.00±0.15

0.00±0.08

X° X'±2°

DATE

2017.06.16

UNIT: MM

0.00±0.15

0.00±0.08

0.00±0.08

X° X'±2°

DATE

2017.06.16

0.00±0.15

0.00±0.08

X° X'±2°

DATE

2017.06.16

UNIT: MM

0.00±0.15

0.00±0.08

0.00±0.08

X° X'±2°

DATE

2017.06.16

0.00±0.15

0.00±0.08

X° X'±2°

DATE

2017.06.16

UNIT: MM

0.00±0.15

0.00±0.08

0.00±0.08

X° X'±2°

DATE

2017.06.16

0.00±0.15

0.00±0.08

X° X'±2°

DATE

2017.06.16

UNIT: MM

0.00±0.15

0.00±0.08

0.00±0.08

X° X'±2°

DATE

2017.06.16

0.00±0.15

0.00±0.08

X° X'±2°

DATE

2017.06.16

UNIT: MM

0.00±0.15

0.00±0.08

0.00±0.08

X° X'±2°