



环保物料

A



B±0.3

主要技术参数 Main Specifications

线 数 (Poles): 02 to 20
接触电阻 (Contact resistance): ≤30mΩ
绝缘电阻 (Insulation resistance): ≥1000MΩ
额定电压 (Rated voltage): 250V AC DC
额定电流 (Rated current): 3.0A AC DC
耐 电 压 (Withstand Voltage): 1000V AC/minute
温度范围 (Temperature Range): -25℃~+105℃

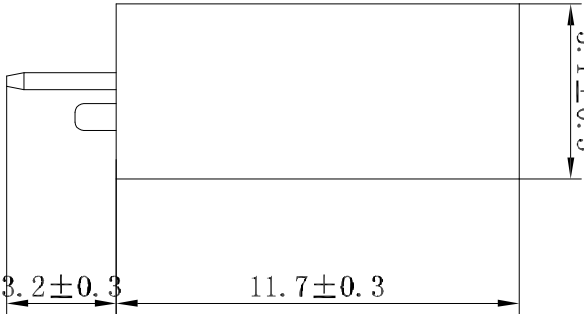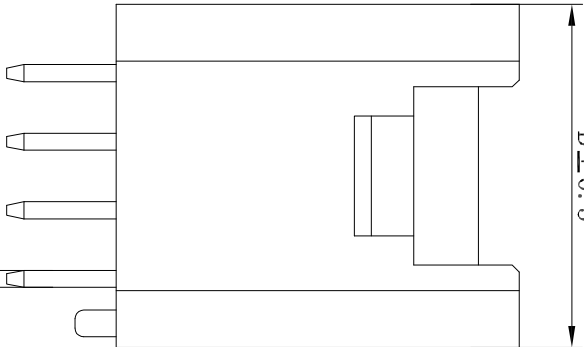

0.5

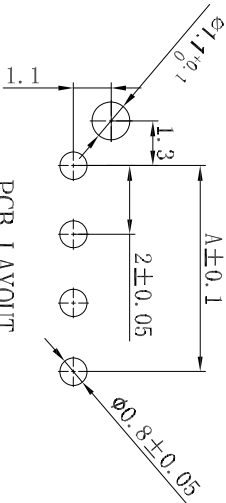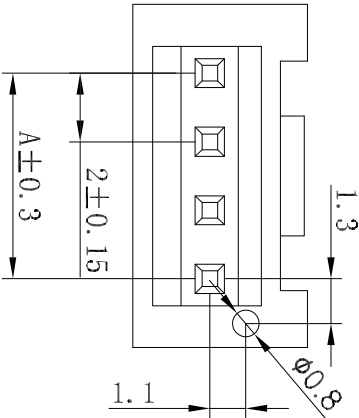

PCB LAYOUT

Circuits	Dimensions(mm)	
	DIM. A	DIM. B
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00
17	32.00	36.00
18	34.00	38.00
19	36.00	40.00
20	38.00	42.00

B	CONTACT	2~16 PCS	Brass	Sn-plated
A	PEDESTAL	1 PCS	PA66	COLOR:BEIGE
ITEM	COMPONENT	QTY	MATERIAL	FINISH

PART. NO:
22011HY

DWG. NO.:

REV: A0

SHEET: 1/1



康 导 新 能 源
网址: www.kdgonna.com 电话: 0789-85337833
邮箱: 2850178988@qq.com 传真: 0789-85392827

TITLE: 2.00mm PITCH 180° WAFER DIP TYPE

GENERAL TOLERANCES

SCALE:
1:1

NAME

DATE



L/NEAR

ANGLES

APPROVED

DESIGNER

DRAWN

UNIT: MM

SIZE: A4

DATE

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35

X° REF±6°

0.00±0.15

0.00±0.25

X° ±3°

X° X'±2°

0.00±0.35