

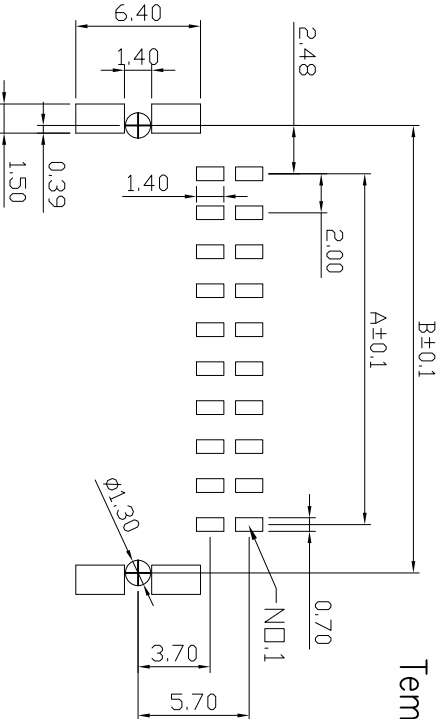
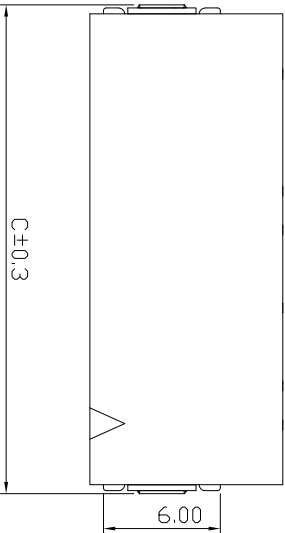


环保物料

Specifications:
Voltage Rating : 250V AC/DC
Current Rating : 3A AC,DC
Withstand Voltage : 1000V AC/minute
Contact Resistance : 20mΩ(MAX.)
Insulation Resistance : 1000MΩ(MIN.)
Temperature Range : -55°C~+150°C



Recommended PCB Layout

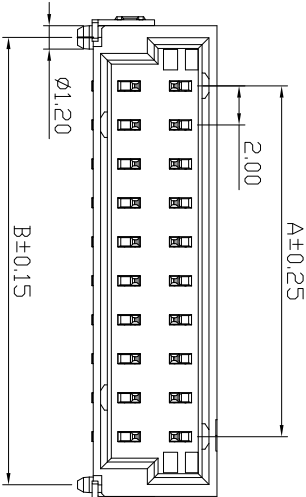

Unit: mm

Part No.	Dimensions		
	A	B	C
2*2P	2.0	6.96	9.09
2*3P	4.0	8.96	11.09
2*4P	6.0	10.96	13.09
2*5P	8.0	12.96	15.09
2*6P	10.0	14.96	17.09
2*7P	12.0	16.96	19.09
2*8P	14.0	18.96	21.09
2*9P	16.0	20.96	23.09
2*10P	18.0	22.96	25.09
2*11P	20.0	24.96	27.09
2*12P	22.0	26.96	29.09
2*13P	24.0	28.96	31.09
2*14P	28.0	30.96	33.09
2*15P	30.0	32.96	35.09
2*16P	32.0	34.96	37.09
2*17P	34.0	36.96	39.09
2*18P	36.0	38.96	41.09
2*19P	38.0	40.96	43.09
2*20P	40.0	42.96	45.09

Material	Color	PIN Material
LCP,UL94V-0	Black	Brass



GENERAL TOLERANCES

SCALE: 1:1

NAME

DATE

LINER

ANGLES

APPROVED

黎腾

2017. 06. 16

0.0±0.25

X° REF±6°

DESIGNER

肖坤权

2017. 06. 16

UNIT: MM

X° ±3°

DRAWN

尹洪

2017. 06. 16

SIZE: A4

0.000±0.08

X° X'±2°



康导新能源
www.dgpcn.com 电话: 0700-883377633
地址: 2850175588@qq.com 传真: 0700-883822827

TITLE:
2.00mm pitch Single Wafer

PART. NO:
42016W90-2xNPA-A1-RS
DWG. NO:
ENDE05
REV: A0 SHEET: 1/1