
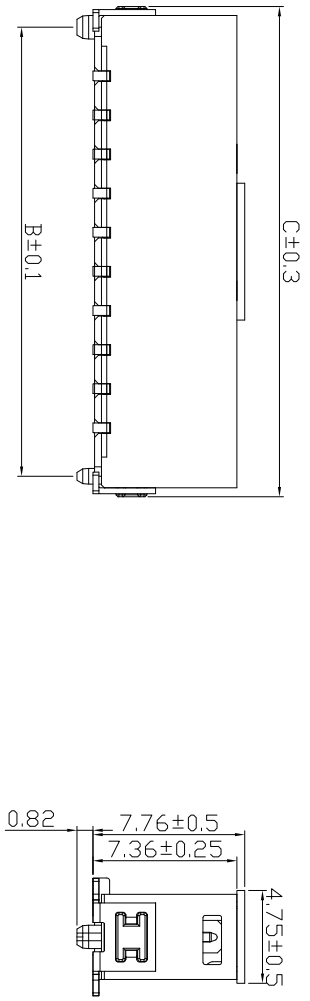


环保物料

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

Specifications:
Voltage Rating : 250V AC/DC
Current Rating : 3A AC,DC
Withstand Voltage : 500V AC/minute
Contact Resistance : 20mΩ(MAX.)
Insulation Resistance : 1000MΩ(MIN.)
Temperature Range : -55°C~+150°C

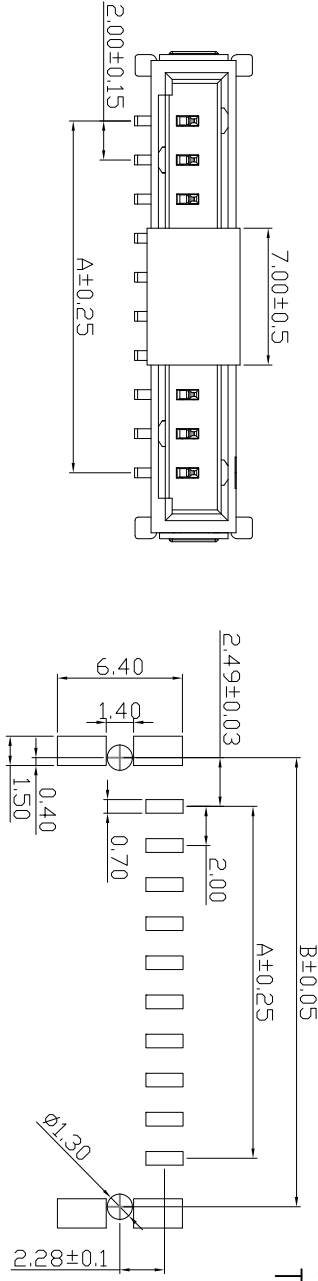

Unit: mm			
Part No.	Dimensions		
	A	B	C
1*2P	2.0	6.97	9.08
1*3P	4.0	8.97	11.08
1*4P	6.0	10.97	13.08
1*5P	8.0	12.97	15.08
1*6P	10.0	14.97	17.08
1*7P	12.0	16.97	19.08
1*8P	14.0	18.97	21.08
1*9P	16.0	20.97	23.08
1*10P	18.0	22.97	25.08
1*11P	20.0	24.97	27.08
1*12P	22.0	26.97	29.08
1*13P	24.0	28.97	31.08
1*14P	28.0	30.97	33.08
1*15P	30.0	32.97	35.08
1*16P	32.0	34.97	37.08
1*17P	34.0	36.97	39.08
1*18P	36.0	38.97	41.08
1*19P	38.0	40.97	43.08
1*20P	40.0	42.97	45.08

H											