
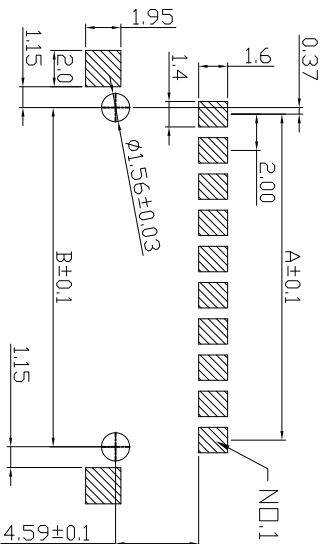




环保物料

12345678

Specifications:
Voltage Rating : 250V AC/DC
Current Rating : 3A AC,DC
Withstand Voltage : 500V AC/minute
Contact Resistance : 20mΩ(MAX.)
Insulation Resistance : 1000MΩ(MIN.)
Temperature Range : -55°C~+150°C

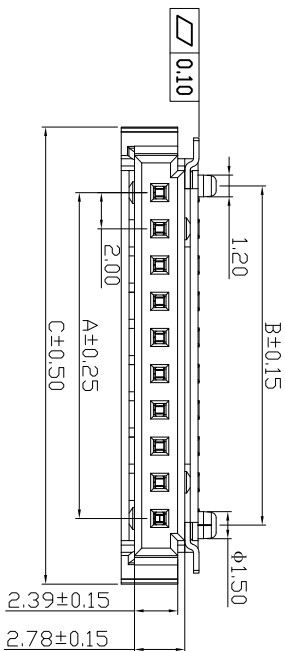

Recommended PCB Layout

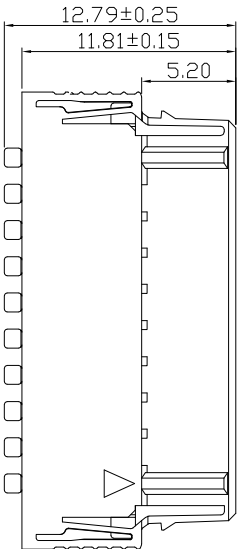

Unit: mm

Part No.	Dimensions		
	A	B	C
1*2P	2.0	2.74	9.24
1*3P	4.0	4.74	11.24
1*4P	6.0	6.74	13.24
1*5P	8.0	8.74	15.24
1*6P	10.0	10.74	17.24
1*7P	12.0	12.74	19.24
1*8P	14.0	14.74	21.24
1*9P	16.0	16.74	23.24
1*10P	18.0	18.74	25.24
1*11P	20.0	20.74	27.24
1*12P	22.0	22.74	29.24
1*13P	24.0	24.74	31.24
1*14P	28.0	28.74	33.24
1*15P	30.0	30.74	35.24
1*16P	32.0	32.74	37.24
1*17P	34.0	34.74	39.24
1*18P	36.0	36.74	41.24
1*19P	38.0	38.74	43.24
1*20P	40.0	40.74	45.24

Material	Color	PIN Material
LCP,UL94V-0	Black	Brass

GENERAL TOLERANCES

SCALE: 1:1

NAME DATE



PART. NO: 42017W90-1xNPA-A3-RS

LINER

APPROVED

2017. 06. 16

黎腾

ENDE05

ANGLES

DESIGNER

2017. 06. 16

肖坤权

SHEET: 1/1

0.0±0.25

DRAWN

2017. 06. 16

尹洪

REV: A0

UNIT: MM

SIZE: A4

0.000±0.08

新图面发行

REVISION RECORD

12345678