

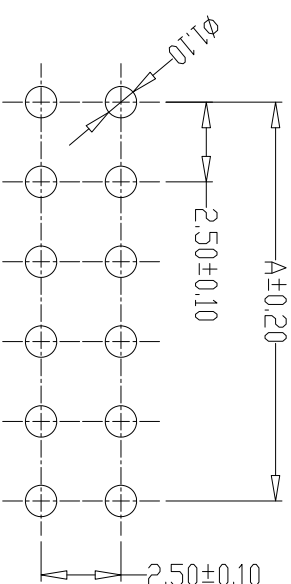
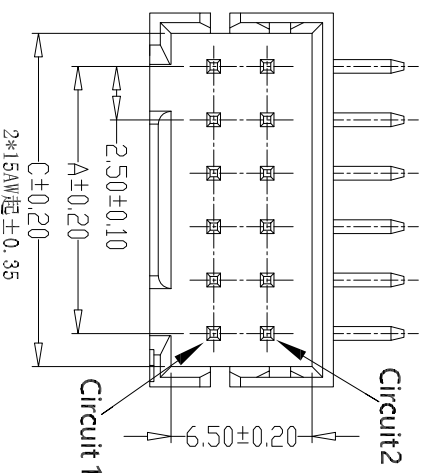


环保物料

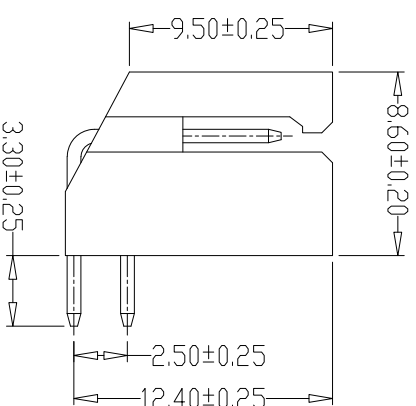

PCB LAYOUT

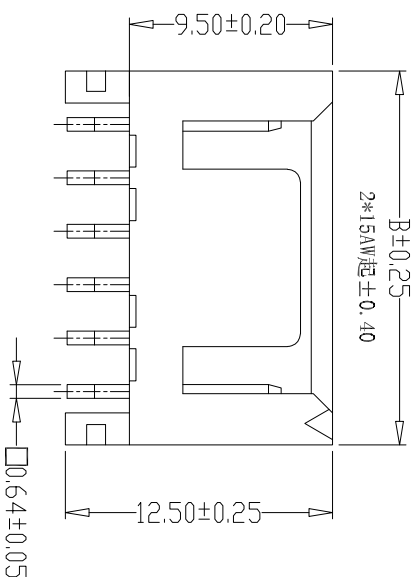

PIN	尺寸 (mm)		
	A	B	C
2*02AW	2.50	7.50	5.60
2*03AW	5.00	10.00	8.10
2*04AW	7.50	12.50	10.60
2*05AW	10.00	15.00	13.10
2*06AW	12.50	17.50	15.60
2*07AW	15.00	20.00	18.10
2*08AW	17.50	22.50	20.60
2*09AW	20.00	25.00	23.10
2*10AW	22.50	27.50	25.60
2*11AW	25.00	30.00	28.10
2*12AW	27.50	32.50	30.60
2*13AW	30.00	35.00	33.10
2*14AW	32.50	37.50	35.60
2*15AW	35.00	40.00	38.10
2*16AW	37.50	42.50	40.60
2*17AW	40.00	45.00	43.10
2*18AW	42.50	47.50	45.60
2*19AW	45.00	50.00	48.10
2*20AW	47.50	52.50	50.60

主要技术参数 Main Specifications

接线数	(Poles): 04~40
接触电阻	(Contact resistance): $\leq 30\text{m}\Omega$
绝缘电阻	(Insulation resistance): $\geq 1000\text{M}\Omega$
额定电压	(Rated voltage): 250V AC DC
额定电流	(Rated current): 3.0A AC DC
耐电压	(Withstand Voltage): 800V AC/minute
温度范围	(Temperature Range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

环保物料

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

主要技术参数 Main Specifications

线数 (Poles) : 04~40
接触电阻 (Contact resistance) : $\leq 30\text{m}\Omega$
绝缘电阻 (Insulation resistance) : $\geq 1000\text{M}\Omega$
额定电压 (Rated voltage) : 250V AC DC
额定电流 (Rated current) : 3.0A AC DC
耐电压 (Withstand Voltage): 800V AC/minute
温度范围 (Temperature Range) : $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Top view of the PCB layout. Dimensions include: 2.50±0.10 (pitch), A±0.20 (width), C±0.20 (width), 2*15AW起±0.35 (edge distance), 6.50±0.20 (width), and 9.50±0.20 (width). Circuit 1 and Circuit 2 are indicated.

Side view of the PCB layout. Dimensions include: A±0.20 (width), 2.50±0.10 (pitch), 2.50±0.10 (pitch), and $\phi 1.10$ (pin diameter).

PCB LAYOUT

Bottom view of the PCB layout. Dimensions include: B±0.25 (width), 2*15AW起±0.40 (edge distance), 12.50±0.25 (width), and 9.50±0.20 (width). Pin diameter is $\phi 0.64 \pm 0.05$.

Front view of the PCB layout. Dimensions include: 8.60±0.20 (width), 9.50±0.25 (width), 3.30±0.25 (width), 2.50±0.25 (pitch), and 12.40±0.25 (width).

PIN	尺寸 (mm)		
	A	B	C
2*02AW	2.50	7.50	5.60
2*03AW	5.00	10.00	8.10
2*04AW	7.50	12.50	10.60
2*05AW	10.00	15.00	13.10
2*06AW	12.50	17.50	15.60
2*07AW	15.00	20.00	18.10
2*08AW	17.50	22.50	20.60
2*09AW	20.00	25.00	23.10
2*10AW	22.50	27.50	25.60
2*11AW	25.00	30.00	28.10
2*12AW	27.50	32.50	30.60
2*13AW	30.00	35.00	33.10
2*14AW	32.50	37.50	35.60
2*15AW	35.00	40.00	38.10
2*16AW	37.50	42.50	40.60
2*17AW	40.00	45.00	43.10
2*18AW	42.50	47.50	45.60
2*19AW	45.00	50.00	48.10
2*20AW	47.50	52.50	50.60

B	CONTACT	4-40PCS	Brass	Tin-plated
A	PEDESTAL	1 PCS	PA66	COLOR:WHITE
ITEM	COMPONENT	QTY	MATERIAL	FINISH