


环保物料

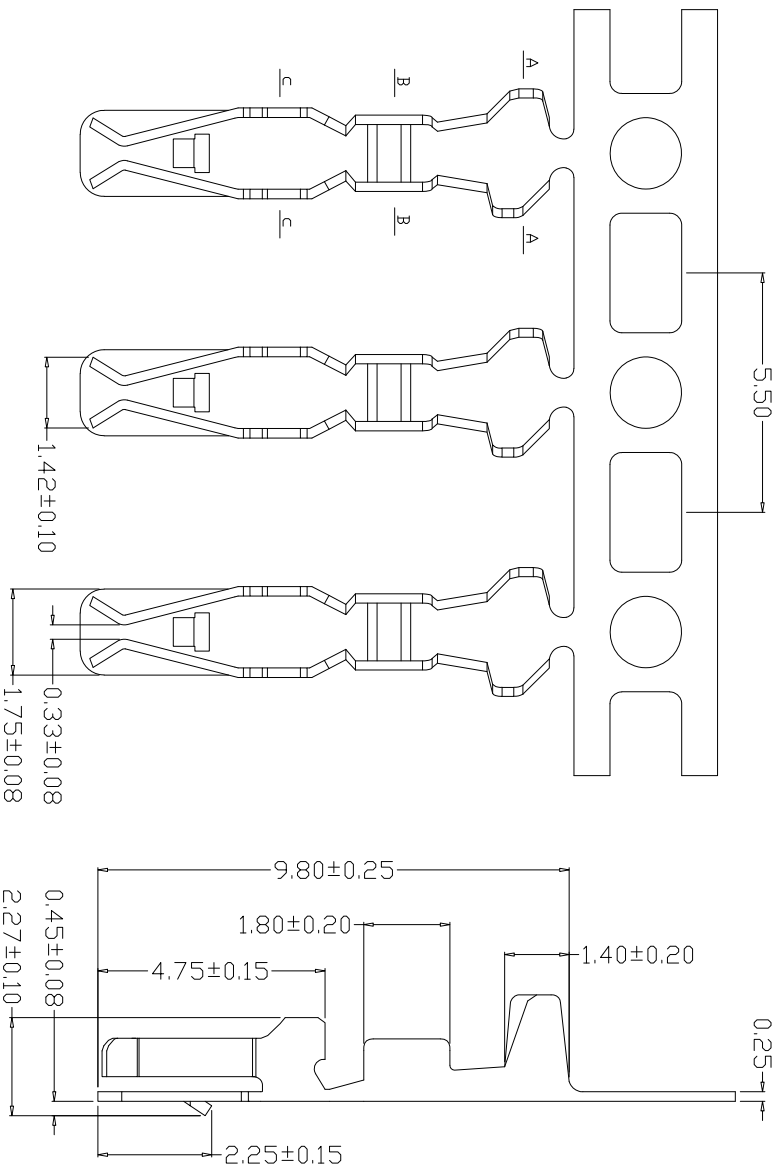

主要技术参数 Main Specifications

接触电阻 (Contact resistance): $\leq 30\text{m}\Omega$

绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$

额定电压 (Rated voltage): 250V AC DC

额定电流 (Rated current): 3.0A AC DC

耐电压 (Withstand Voltage): 800 V AC/minute

温度范围 (Temperature Range) : $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Technical drawing of the U-shaped cross-section of the 'U' symbol, showing dimensions and material specifications.

Dimensions:

- Top Width: 3.00 ± 0.25
- Bottom Width: 2.45 ± 0.25
- Height: 1.90 ± 0.10
- Top Flange Thickness: ± 0.25
- Top Flange Width: 2.20 ± 0.25
- Bottom Flange Thickness: 1.50 ± 0.25
- Bottom Flange Width: 1.80 ± 0.25

Material: AWG #22-#24

Section Labels: SEC:A-A, SEC:B-B

Wire Range	Insulation O. D.	Material	Finish	Qty/Reel
AWG #24~#28	1.90mm (max)	Phosphor bronze	Tin-plated	
AWG #22~#24	1.06mm (max)			

[illegible]