
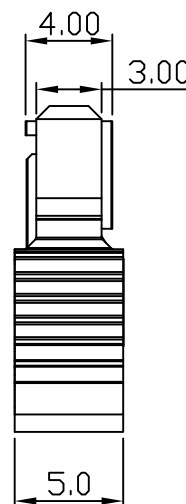
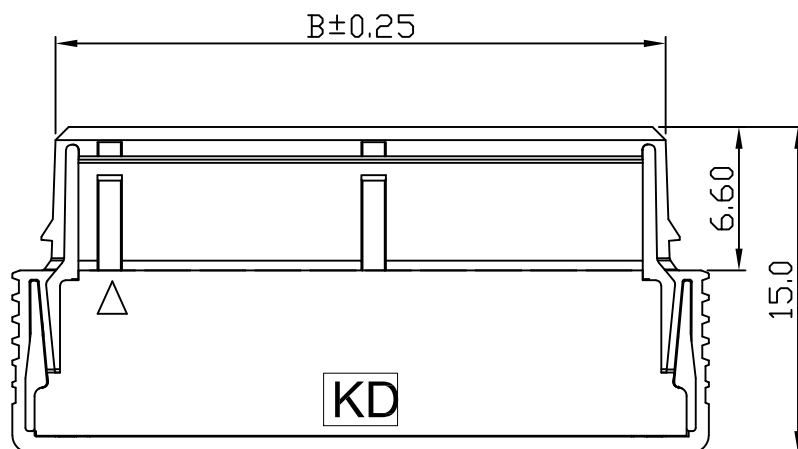


环保物料

Specifications:
Voltage Rating : 250V AC/DC
Current Rating : 8A AC,DC
Withstand Voltage : 1000V AC/minute
Contact Resistance : 20mΩ(MAX.)
Insulation Resistance : 1000MΩ(MIN.)
Temperature Range : -55°C~+150°C

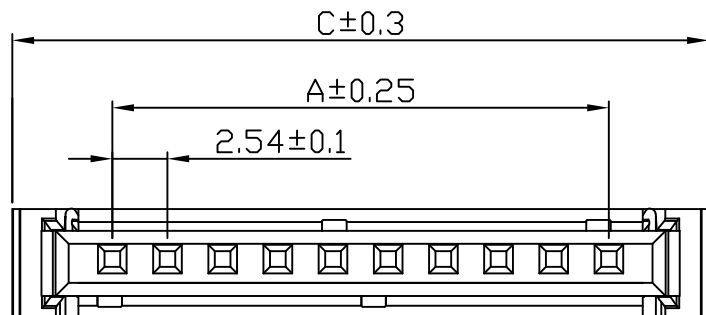

Unit: mm

Part No.	Dimensions		
	A	B	C
1*2P	2.54	7.76	11.74
1*3P	5.08	10.30	14.28
1*4P	7.62	12.84	16.82
1*5P	10.16	15.38	19.36
1*6P	12.70	17.92	21.90
1*7P	15.24	20.46	24.44
1*8P	17.78	23.00	26.98
1*9P	20.32	25.54	29.52
1*10P	22.86	28.08	32.06
Material		Color	
PA66,UL94V-0		Black	

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 康导新能源 网址: www.dgoonne.com 电话: 0769-853377633 邮箱: 2850175986@qq.com 传真: 0769-853922827	PART. NO: 42542H00-1xNPA-KD-RS
				LINEAR	ANGLES					
				0.0±0.25	X° REF±6°					
A0	新图面发行	2017.06.16	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER	肖坤权	2017.06.16	TITLE: 2.54mm pitch Dual Housing	DWG. NO: ENDE05
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	旷淇	2017.06.16		REV: A0 SHEET: 1/1