
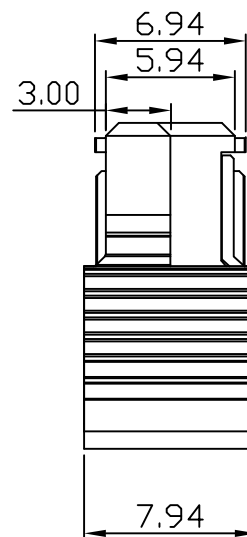
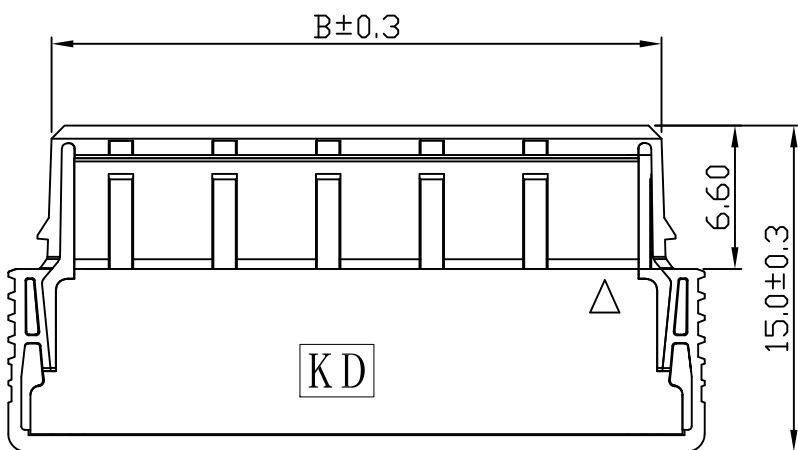


环保物料

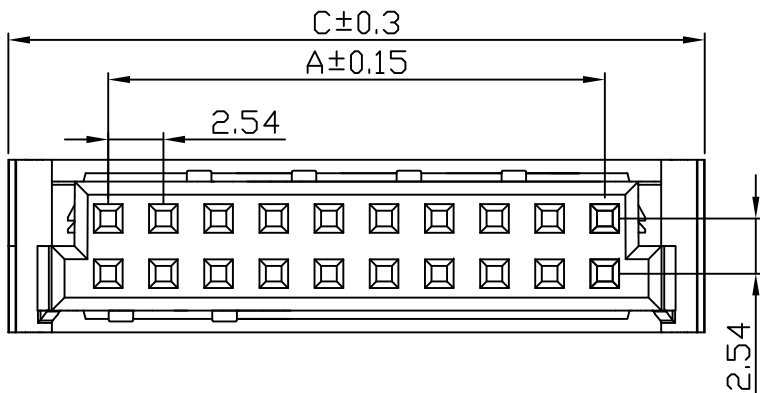

Specifications:
Voltage Rating : 250V AC/DC
Current Rating : 8A AC,DC
Withstand Voltage : 1000V AC/minute
Contact Resistance : 20mΩ(MAX.)
Insulation Resistance : 1000MΩ(MIN.)
Temperature Range : -55°C~+150°C

Unit: mm

Part No.	Dimensions		
	A	B	C
2*2P	2.54	7.76	11.74
2*3P	5.08	10.30	14.28
2*4P	7.62	12.84	16.82
2*5P	10.16	15.38	19.36
2*6P	12.70	17.92	21.90
2*7P	15.24	20.46	24.44
2*8P	17.78	23.00	26.98
2*9P	20.32	25.54	29.52
2*10P	22.86	28.08	32.06
2*11P	25.40	30.62	34.60
2*12P	27.94	33.16	37.14
2*13P	30.48	35.70	39.68
2*14P	33.02	38.24	42.22
2*15P	35.56	40.78	44.76
2*16P	38.10	43.32	47.30
2*17P	40.64	45.86	49.84
2*18P	43.18	48.40	52.38
2*19P	45.72	50.94	54.92
2*20P	48.26	53.48	57.46

Material	Color
PA46,UL94V-0	Black

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 康 导 新 能 源 网址: www.dgoonne.com 电话: 0769-85377633 邮箱: 2850175986@qq.com 传真: 0769-853922827	PART. NO: 42542H00-2XNPA-KD-RS	
				LINEAR	ANGLES	APPROVED	黎腾	2017. 06. 16		DWG. NO:	
				0. 0±0. 25	X° REF±6°	DESIGNER	肖坤权	2017. 06. 16		ENDE05	
A0	新图面发行	2017. 06. 16	UNIT: MM	0. 00±0. 15	X° ±3°			TITLE: 2. 00mm pitch Dual Housing		REV: A0	SHEET: 1/1
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000±0. 08	X° X'±2°	DRAWN	旷淇	2017. 06. 16			