

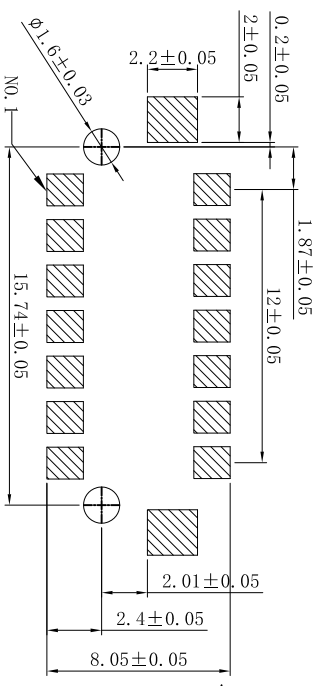
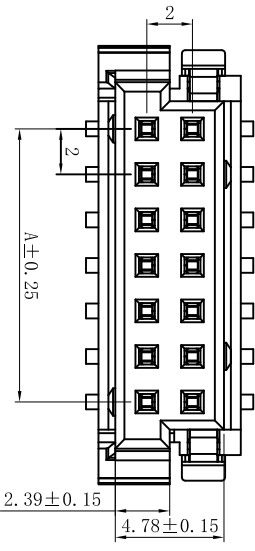


环保物料

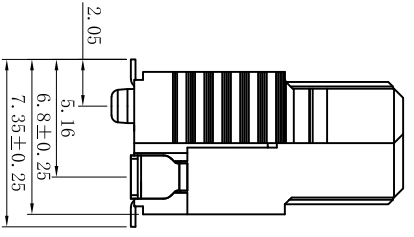

Specifications:
Voltage Rating : 250V AC/DC
Current Rating : 3A AC,DC
Withstand Voltage : 500V AC/minute
Contact Resistance : 20mΩ(MAX.)
Insulation Resistance : 1000MΩ(MIN.)
Temperature Range : -55°C~+150°C

Recommended PCB Layout

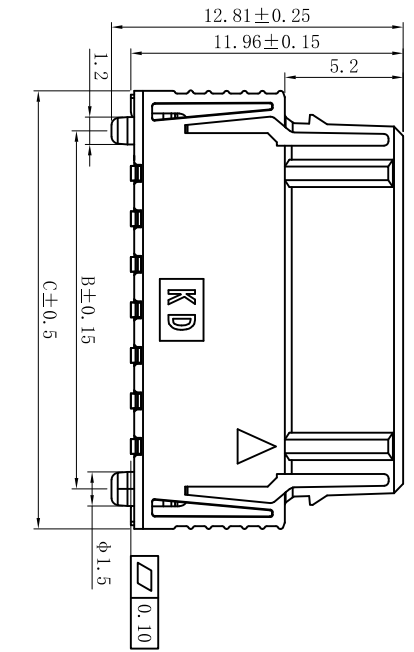

Part No.	Dimensions			Unit: mm
	A	B	C	
2*2P	2.0	2.74	9.24	
2*3P	4.0	4.74	11.24	
2*4P	6.0	6.74	13.24	
2*5P	8.0	8.74	15.24	
2*6P	10.0	10.74	17.24	
2*7P	12.0	12.74	19.24	
2*8P	14.0	14.74	21.24	
2*9P	16.0	16.74	23.24	
2*10P	18.0	18.74	25.24	
2*11P	20.0	20.74	27.24	
2*12P	22.0	22.74	29.24	
2*13P	24.0	24.74	31.24	
2*14P	28.0	28.74	33.24	
2*15P	30.0	30.74	35.24	
2*16P	32.0	32.74	37.24	
2*17P	34.0	34.74	39.24	
2*18P	36.0	36.74	41.24	
2*19P	38.0	38.74	43.24	
2*20P	40.0	40.74	45.24	

Material	Color	PIN Material
LCP,UL94V-0	Black	Brass

GENERAL TOLERANCES	SCALE:		NAME	DATE	TITLE:	2.00mm pitch Single Wafer	REV:	A0	SHEET: 1/1
	LINEAR	ANGLES							
	0.0±0.25	X° REF±6°	APPROVED	黎腾	2017.06.16				
			DESIGNER	肖坤权	2017.06.16				
A0	新图面发行	2017.06.16	UNIT: MM	0.00±0.15	X° ±3°				
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°				
1	2	3	4	5	6	7	8		