

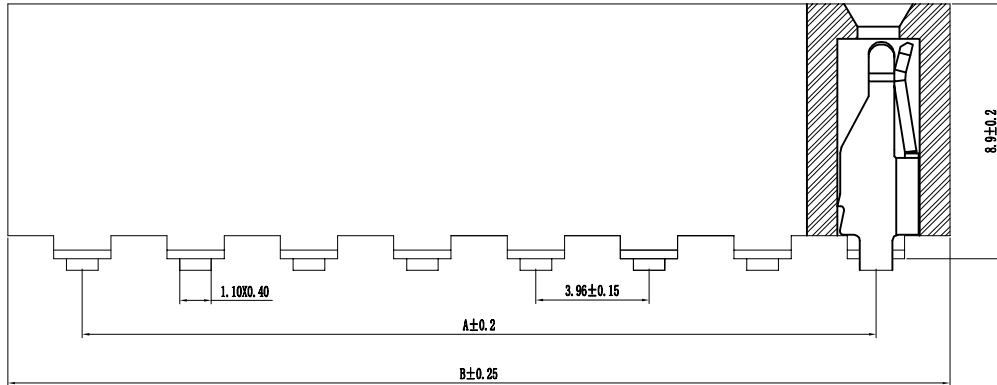



环保物料

Pin数	尺寸A	尺寸B
1x2	3.96	7.92
1x3	7.92	11.88
1x4	11.88	15.84
1x5	15.84	19.80
1x6	19.80	23.76
1x7	23.76	27.72
1x8	27.72	31.68
1x9	31.68	35.64
1x10	35.64	39.60
1x11	39.60	43.56
1x12	43.56	47.52
1x13	47.52	51.48
1x14	51.48	55.44
1x15	55.44	59.40
1x16	59.40	63.36
1x17	63.36	67.32
1x18	67.32	71.28
1x19	71.28	75.24
1x20	75.24	79.20
1x21	79.20	83.16
1x22	83.16	87.12
1x23	87.12	91.08
1x24	91.08	95.04
1x25	95.04	99.00
1x26	99.00	102.96
1x27	102.96	106.92
1x28	106.92	110.88
1x29	110.88	114.84
1x30	114.84	118.80
1x31	118.80	122.76
1x32	122.76	126.72
1x33	126.72	130.68
1x34	130.68	134.64
1x35	134.64	138.60
1x36	138.60	142.56
1x37	142.56	146.52
1x38	146.52	150.48
1x39	150.48	154.44
1x40	154.44	158.40

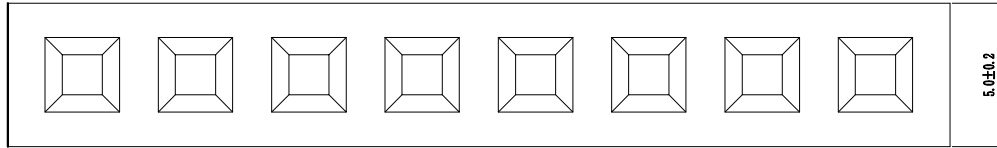

Specification:  
 Current Rating : 7AMP  
 Temperature Range : -40°Cto+105°C  
 Contact Resistance : 20mΩ Max  
 Insulation Resistance : 1000MΩ Min  
 Withstanding Voltage : AC 500V  
 Material:  
 Insulator : Polyester (UL94V-0)  
 Standard:PA6T/LCP  
 Contact: Bronze  
 Plating : Au or Sn Over 50u" Ni

PCB LAYOUT

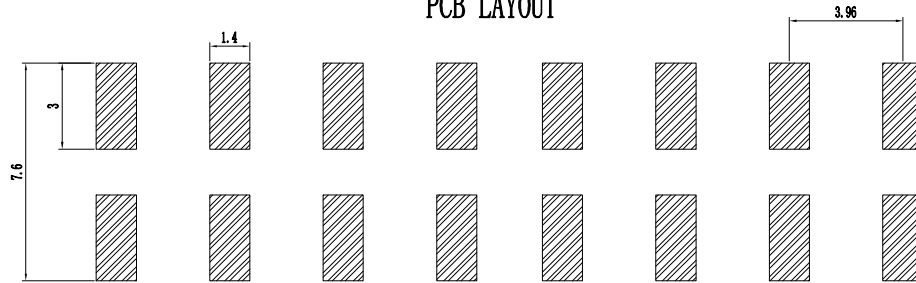

F 39 9S-XXX X X-XX-X-XXX  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

① Series No: P=Pin Header F=Female Header B=Box Header E=Ejector Header	② Pitch: 08=0.80 10=1.00 12=1.27 20=2.00 25=2.54 39=3.96 50=5.08	③ Tail/Mounting Style: 90=Right Angle DIP Type 9S=Straight SMT Type 0D=Straight DIP Type 0S=Horizontal SMT Type	④ No. of Pins: Single Row 101=1*1Pin 102=1*2Pin 140=1*40pin	⑤ Insulator Color: A:Black B:Brown C:Red D:Orange E:Yellow F:Green G:Blue H:Violet J:Gray K:White P:Light Blue
⑥ Material Type: A=PBT B=PA46 C=PA6T D=PA9T E=LCP	⑦ Plating Type: 0#-Sn-Au 1#-Ni 2#-Sn 3#-Matte-Tin 5#-Au 0A-Sn-Au 1u" 0F-Sn-Au 10u" 5A-Au 1u" 0B-Sn-Au 2u" 0G-Sn-Au 15u" 5B-Au 2u" 0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u" 0D-Sn-Au 4u" 0I-Sn-Au 40u" 5D-Au 4u" 0E-Sn-Au 5u" 0J-Sn-Au 50u" 5J-Au 50u"	⑧ RoHS Request: 0:No Request 1:RoHS 2:HF (Halogen Free)	⑨ Customer Code	

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
				0.00±0.15	X° REF±6°	APPROVED	黎腾	2017.06.16
				0.00±0.15	X° ±3°	DESIGNER	肖坤权	2017.06.16
				0.000±0.08	X° X'±2°	DRAWN	旷淇	2017.06.16

**康导新能源**  
 网址: www.dgoonne.com 电话: 0768-85337833  
 邮箱: 2850175888@qq.com 传真: 0768-85382827

TITLE:  
 Pitch3.96mm Female Header, Single Row,  
 Plastic Height 8.9mm, SMT Type(U)

PART. NO: KDFH-0214
DWG. NO: ENDE1214
REV: AO SHEET: 1/1