

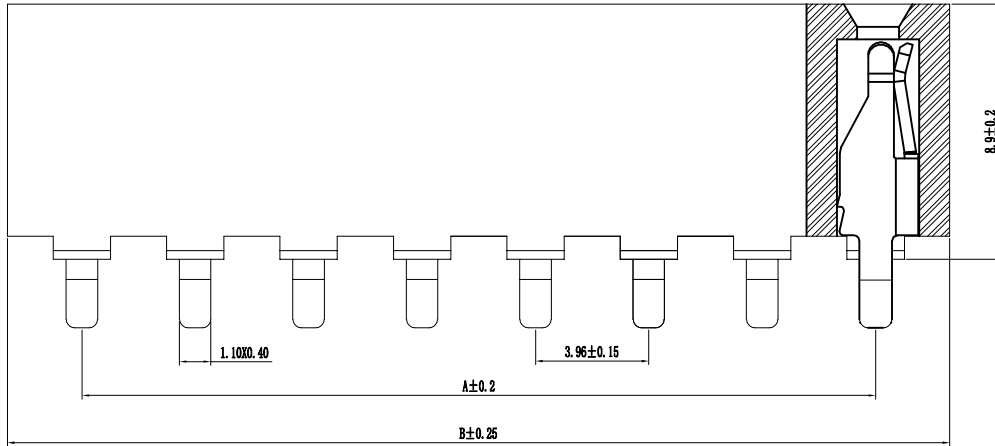



环保物料

Pin数	尺寸A	尺寸B
1×2	3.96	7.92
1×3	7.92	11.88
1×4	11.88	15.84
1×5	15.84	19.80
1×6	19.80	23.76
1×7	23.76	27.72
1×8	27.72	31.68
1×9	31.68	35.64
1×10	35.64	39.60
1×11	39.60	43.56
1×12	43.56	47.52
1×13	47.52	51.48
1×14	51.48	55.44
1×15	55.44	59.40
1×16	59.40	63.36
1×17	63.36	67.32
1×18	67.32	71.28
1×19	71.28	75.24
1×20	75.24	79.20
1×21	79.20	83.16
1×22	83.16	87.12
1×23	87.12	91.08
1×24	91.08	95.04
1×25	95.04	99.00
1×26	99.00	102.96
1×27	102.96	106.92
1×28	106.92	110.88
1×29	110.88	114.84
1×30	114.84	118.80
1×31	118.80	122.76
1×32	122.76	126.72
1×33	126.72	130.68
1×34	130.68	134.64
1×35	134.64	138.60
1×36	138.60	142.56
1×37	142.56	146.52
1×38	146.52	150.48
1×39	150.48	154.44
1×40	154.44	158.40

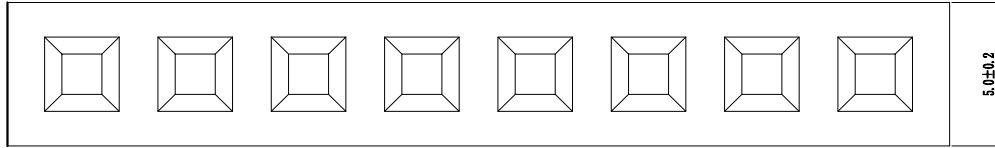

Specification:
 Current Rating : 7AMP
 Temperature Range : -40°Cto+105°C
 Contact Resistance : 20mΩ Max
 Insulation Resistance : 1000MΩ Min
 Withstanding Voltage : AC 500V
 Material:
 Insulator : Polyester (UL94V-0)
 Standard:PBT/PA6T/LCP
 Contact: Bronze
 Plating : Au or Sn Over 50u" Ni

PCB LAYOUT

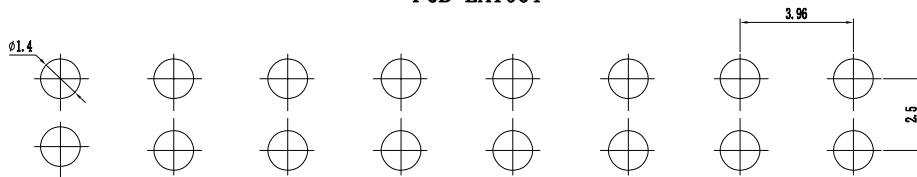

F 39 0D-XXX X X-XX-X-XXX
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

① Series No: P=Pin Header F=Female Header B=Box Header E=Ejector Header	② Pitch: 08=0.80 10=1.00 12=1.27 20=2.00 25=2.54 39=3.96 50=5.08	③ Tail/Mounting Style: 9D=Right Angle DIP Type 9S=Straight SMT Type 0D=Straight DIP Type 0S=Horizontal SMT Type	④ No. of Pins: Single Row Double Row 101=1*1Pin 201=2*1Pin 102=1*2Pin 202=2*2Pin ! ! ! ! 140=1*40pin 240=2*40pin	⑤ Insulator Color: A:Black B:Brown C:Red D:Orange E:Yellow F:Green G:Blue H:Violet J:Gray K:White P:Light Blue
⑥ Material Type: A-PBT B-PA46 C-PA6T D-PA9T E-LCP	⑦ Plating Type: 0*-Sn-Au 1*-Ni 2*-Sn 3*-Matte-Tin 5*-Au 0A-Sn-Au 1u" 0F-Sn-Au 10u" 5A-Au 1u" 0B-Sn-Au 2u" 0G-Sn-Au 15u" 5B-Au 2u" 0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u" 0D-Sn-Au 4u" 0I-Sn-Au 40u" ! 0E-Sn-Au 5u" 0J-Sn-Au 50u" 5J-Au 50u"	⑧ RoHS Request: 0:No Request 1:RoHS 2:HF (Halogen Free)	⑨ Customer Code	

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
				0.00±0.15	X° REF±6°	APPROVED	黎腾	2017.06.16
				0.00±0.08	X° X'±2°	DESIGNER	肖坤权	2017.06.16
						DRAWN	旷淇	2017.06.16

康导新能源
 网址: www.dgconne.com 电话: 0769-85337633
 邮箱: 2850175888@qq.com 传真: 0769-85392827

PART. NO:	KDFH-0213	
DWG. NO:	ENDE1213	
REV:	AO	SHEET: 1/1