


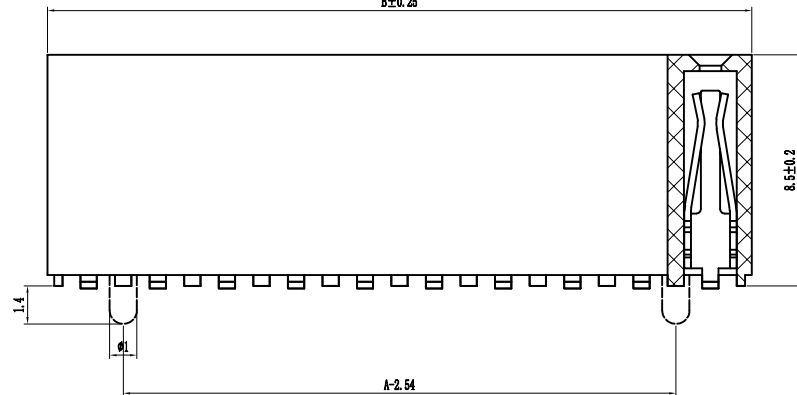



环保物料

| Pin数 | 尺寸A | 尺寸B |
|------|-------|--------|
| 2×2 | 2.54 | 5.58 |
| 2×3 | 5.08 | 8.12 |
| 2×4 | 7.62 | 10.66 |
| 2×5 | 10.16 | 13.20 |
| 2×6 | 12.70 | 15.74 |
| 2×7 | 15.24 | 18.28 |
| 2×8 | 17.78 | 20.82 |
| 2×9 | 20.32 | 23.36 |
| 2×10 | 22.86 | 25.90 |
| 2×11 | 25.40 | 28.44 |
| 2×12 | 27.94 | 30.98 |
| 2×13 | 30.48 | 33.52 |
| 2×14 | 33.02 | 36.06 |
| 2×15 | 35.56 | 38.60 |
| 2×16 | 38.10 | 41.14 |
| 2×17 | 40.64 | 43.68 |
| 2×18 | 43.18 | 46.22 |
| 2×19 | 45.72 | 48.76 |
| 2×20 | 48.26 | 51.30 |
| 2×21 | 50.80 | 53.84 |
| 2×22 | 53.34 | 56.38 |
| 2×23 | 55.88 | 58.92 |
| 2×24 | 58.42 | 61.46 |
| 2×25 | 60.96 | 64.00 |
| 2×26 | 63.50 | 66.54 |
| 2×27 | 66.04 | 69.08 |
| 2×28 | 68.58 | 71.62 |
| 2×29 | 71.12 | 74.16 |
| 2×30 | 73.66 | 76.70 |
| 2×31 | 76.20 | 79.24 |
| 2×32 | 78.74 | 81.78 |
| 2×33 | 81.28 | 84.32 |
| 2×34 | 83.82 | 86.86 |
| 2×35 | 86.36 | 89.40 |
| 2×36 | 88.90 | 91.94 |
| 2×37 | 91.44 | 94.48 |
| 2×38 | 93.98 | 97.02 |
| 2×39 | 96.52 | 99.56 |
| 2×40 | 99.06 | 102.10 |

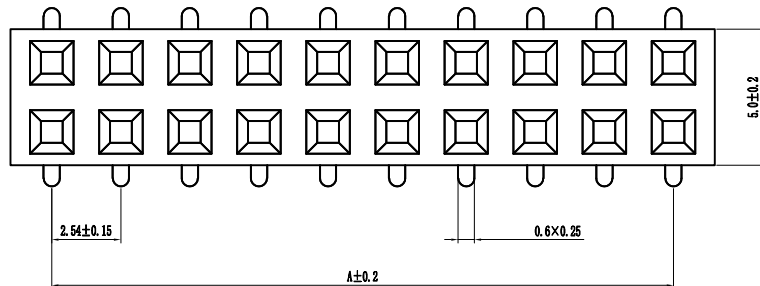

PCB LAYOUT

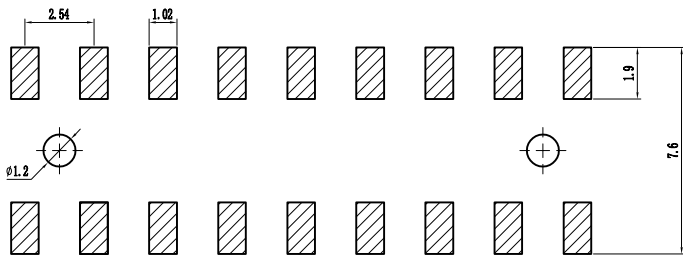

| |
|-----|
| PC |
| 7.1 |
| 8.0 |

Specification:
 Current Rating : 3AMP
 Temperature Range : -40℃to+105℃
 Contact Resistance : 20mΩ Max
 Insulation Resistance : 1000MΩ Min
 Withstanding Voltage : AC 1000V
 Material:
 Insulator : Polyester (UL94V-0)
 Standard:PA6T/LCP
 Contact: Bronze
 Plating : Au or Sn Over 50u" Ni

F 25 9S-XXX X X -XX-X-XXX
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

| ① Series No: | ② Pitch: | ③ Tail/Mounting Style: | ④ No. of Pins: | ⑤ Insulator Color: |
|------------------|----------|-------------------------|-------------------------|---------------------------|
| P=Pin Header | 08-1.00 | 9D-Right Angle DIP Type | Single Row Double Row | A:Black B:Brown C:Red |
| F=Female Header | 10-1.00 | 9S-Straight SMT Type | 101=1*1Pin 201=2*1Pin | D:Orange E:Yellow F:Green |
| B=Box Header | 12-1.27 | 0D-Straight DIP Type | 102=1*2Pin 202=2*2Pin | G:Blue H:Violet J:Gray |
| E=Ejector Header | 20-2.00 | 0S-Horizontal SMT Type | i i i i | K:White P:Light Blue |
| | 25-2.54 | | 140=1*40pin 240=2*40pin | |
| | 39-3.96 | | | |
| | 50-5.08 | | | |

| ⑥ Material Type: | ⑦ Plating Type: | ⑧ RoHS Request: | ⑨ Customer Code |
|------------------|---|---------------------|-----------------|
| A-PBT | 0*-Sn-Au 1*-Ni 2*-Sn 3*-Matte-Tin 5*-Au | 0:No Request | |
| B-PA46 | 0A-Sn-Au 1u" 0F-Sn-Au 10u" 5A-Au 1u" | 1:RoHS | |
| C-PA6T | 0B-Sn-Au 2u" 0C-Sn-Au 15u" 5B-Au 2u" | 2:HF (Halogen Free) | |
| D-PA9T | 0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u" | | |
| E-LCP | 0D-Sn-Au 4u" 0I-Sn-Au 40u" i | | |
| | 0E-Sn-Au 5u" 0J-Sn-Au 50u" 5J-Au 50u" | | |

| REV. | REVISION RECORD | DATE | UNIT: MM | GENERAL TOLERANCES | | SCALE: 1:1 | NAME | DATE |
|------|-----------------|------|----------|--------------------|-----------|------------|------|------------|
| | | | | LINEAR | ANGLES | | | |
| | | | | 0.00±0.15 | X° REF±6° | APPROVED | 黎腾 | 2017.06.16 |
| | | | | 0.00±0.15 | X° ±3° | DESIGNER | 肖坤权 | 2017.06.16 |
| | | | | 0.000±0.08 | X° X'±2° | DRAWN | 旷淇 | 2017.06.16 |

康导新能源
 网址: www.dgconne.com 电话: 0769-85337833
 邮箱: 2850175988@qq.com 传真: 0769-85392827

| | |
|-----------|-----------|
| PART. NO: | KDFH-0182 |
| DWG. NO: | ENDE1182 |
| REV: | AO |
| SHEET: | 1/1 |