
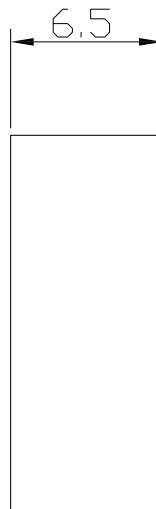




环保物料

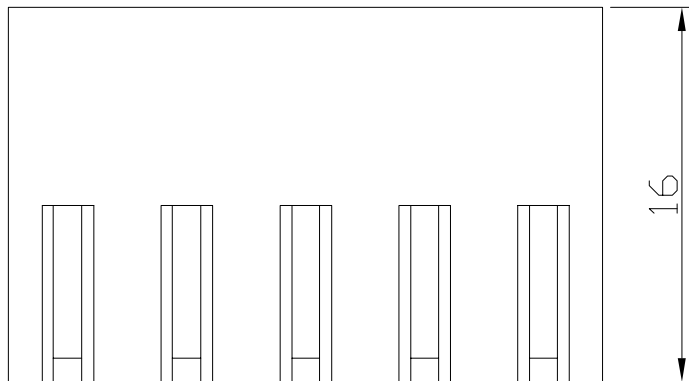


主要技术参数 Main Specifications

线数 (Poles): 02 to 14
 接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$
 额定电压 (Rated voltage): 250V AC DC
 额定电流 (Rated current): 5.0A AC DC
 耐电压 (Withstand Voltage): 1500V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

| Poles | Dimensions mm | |
|-------|---------------|-------|
| | A | B |
| 2 | 5.08 | 10.16 |
| 3 | 10.16 | 15.24 |
| 4 | 15.24 | 20.32 |
| 5 | 20.32 | 25.40 |
| 6 | 25.40 | 30.48 |
| 7 | 30.48 | 35.56 |
| 8 | 35.56 | 40.64 |
| 9 | 40.64 | 45.72 |
| 10 | 45.72 | 50.80 |
| 11 | 50.08 | 55.88 |
| 12 | 55.88 | 60.96 |
| 13 | 60.69 | 66.04 |
| 14 | 66.04 | 71.12 |

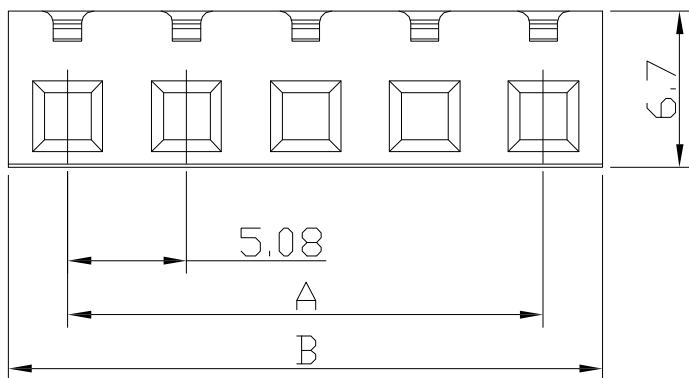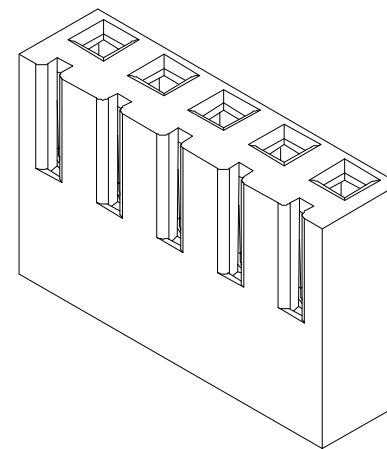

| | | | | | |
|----|------------|--------------------|----|------------------|----|
| 1 | Housing 胶壳 | PA66 (UL94V-0/V-2) | 1 | Transparent 透明白色 | |
| 序号 | 图号 | 名称 | 材料 | 数量 | 附注 |

| | | | | | | | | | | | |
|------|-----------------|--------------------|----------|----------|------|------------|----------|---|---------------------|-----------|------------|
| | | GENERAL TOLERANCES | | SCALE: | DATE | NAME | DATE |  康导新能源 网址: www.dgconne.com 电话: 0769-85337633 邮箱: 2850175986@qq.com 传真: 0769-85392827 | | PART. NO: | |
| | | LINER | ANGLES | APPROVED | 黎腾 | 2017.06.16 | 25081Y2 | | | | |
| AO | 新图面发行 | 2017.06.16 | UNIT: MM | DESIGNER | 肖坤权 | 2017.06.16 | DWG. NO: | | REV: A0 | | SHEET: 1/1 |
| REV. | REVISION RECORD | DATE | SIZE: A4 | DRAWN | 旷淇 | 2017.06.16 | TITLE: | | 5.08mmPITCH HOUSING | | |