

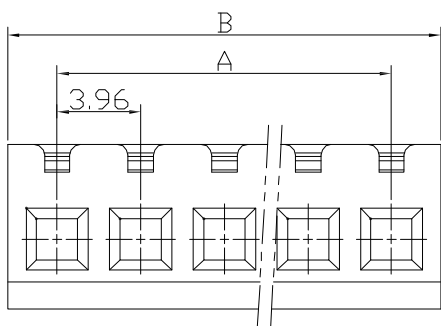


环保物料

主要技术参数 Main Specifications

线 数 (Poles): 02 to 16  
 接触电阻 (Contact resistance):  $\leq 20m\Omega$   
 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$   
 额定电压 (Rated voltage): 250V AC DC  
 额定电流 (Rated current): 7.0A AC DC  
 耐 电 压 (Withstand Voltage): 1500V AC/minute  
 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$

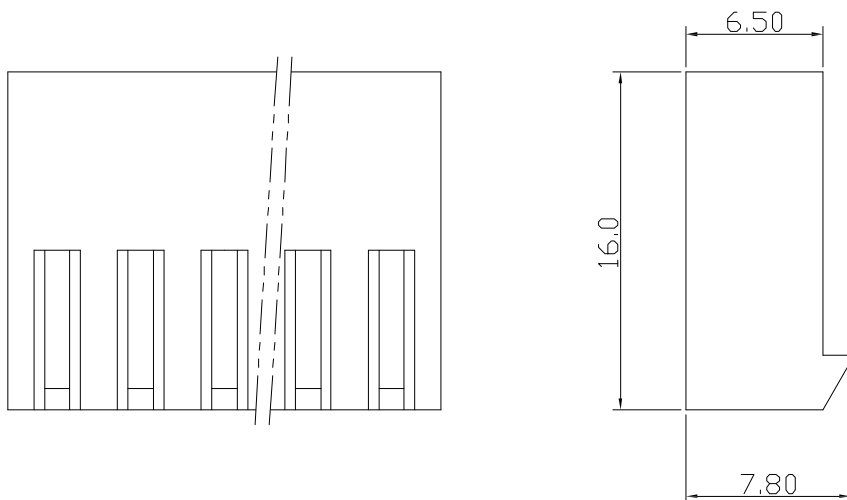

Poles	Dimensions mm	
	A	B
2	3.96	8.68
3	7.92	12.64
4	11.88	16.60
5	15.84	20.56
6	19.80	24.52
7	23.76	28.48
8	27.72	32.44
9	31.68	36.40
10	35.64	40.36
11	39.60	44.32
12	43.56	48.28
13	47.52	52.24
14	51.48	56.20
15	55.44	60.16
16	59.40	64.12

1	Housing 胶壳	PA66 (UL94V-2)	1	Transparent 透明白色	
序号	图 号	名称	材 料	数量	附 注

		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	康 导 新 能 源 网址: www.dgonns.com 电话: 0769-85337633 邮箱: 2850175986@qq.com 传真: 0769-85392827	PART. NO: 23961Y	
		LINEAR	ANGLES	APPROVED	黎腾	2017.06.16		DWG. NO:	
A0	新图面发行	2017.06.16	UNIT: MM	0.00±0.25	X° ±3°	DESIGNER	肖坤权	2017.06.16	TITLE: 3.96mmPITCH HOUSING
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°	DRAWN	旷淇	2017.06.16	REV: A0 SHEET: 1/1