

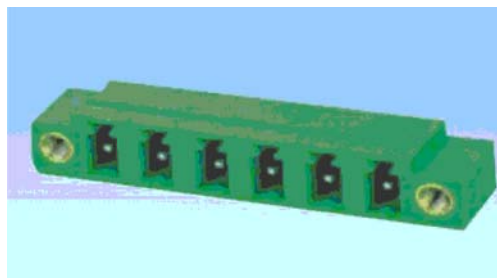


环保物料

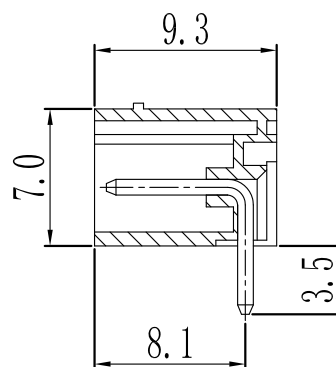

产品型号	MODEL	KD2EDGRM-X
材质&电镀	MATERIAL&PLATING	
螺丝	Screw	-
弹片	Reed	-
焊针	Pin header	黄铜, 镀锡 Brass, Tin plated
塑件	Housing	PA66, UL94V-0
电气性能	ELECTRICAL	UL IEC
额定电压	Rated voltage	300V 320V
额定电流	Rated current	15A 20A
接触电阻	Contact resistance	20mΩ
绝缘电阻	Insulation resistance	500MΩ/1000V
耐电压	Withstanding voltage	AC2000V/1min
使用线径	Wire range	-
机械性能	MECHANICAL	
温度范围	Temp. range	-40℃~+105℃
瞬时温度	Max. soldering	+250℃, 5sec
扭矩	Torque	-
剥线长度	Strip length	-

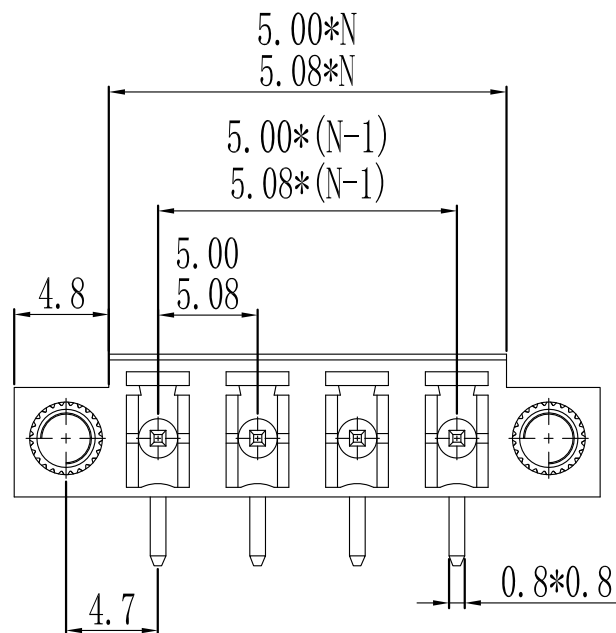

N=Number of Contacts

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 康 导 新 能 源 网址: www.dgonne.com 电话: 0769-85337633 邮箱: 2850175988@qq.com 传真: 0769-85392827	PART. NO: KDTB0105	
				LINEAR	ANGLES	APPROVED	黎腾	2017. 06. 16		DWG. NO:	
				0. 0±0. 35	X° REF±6°	DESIGNER	肖坤权	2017. 06. 16			
A0	新图面发行	2017. 06. 16	UNIT: MM	0. 00±0. 25	X° ±3°	DRAWN	旷淇	2017. 06. 16			TITLE: Pitch5.00/5.08mm Pluggable Terminal Blocks
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000±0. 15	X° X'±2°					REV: A0	SHEET: 1/1