

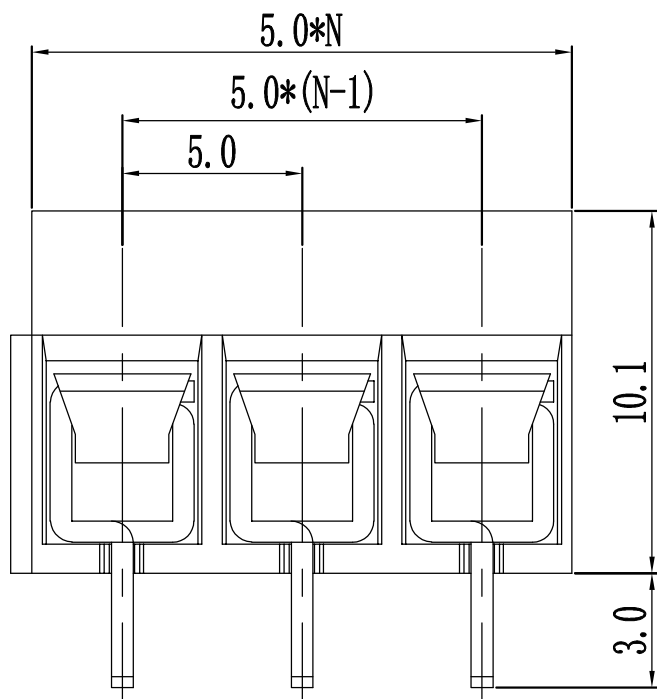


环保物料

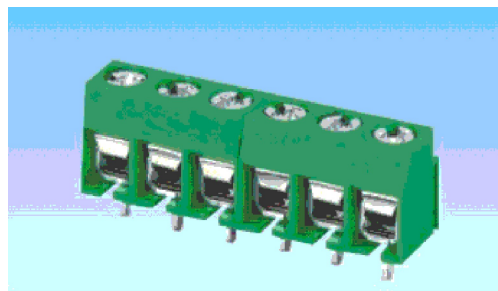

N=Number of Contacts

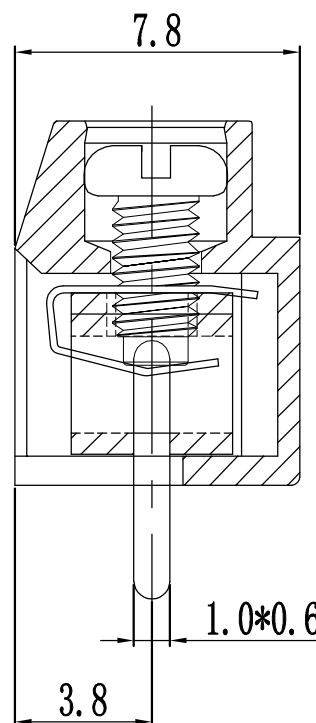

| | | | |
|-------|-----------------------|---|------|
| 产品型号 | MODEL | KD126V | |
| 材质&电镀 | MATERIAL&PLATING | | |
| 螺丝 | Screw | M2.5, 钢, 镀锌 steel, Zinc Plated | |
| 弹片 | Reed | 磷青铜镀镍或不锈钢 Phosphor Bronze, Ni plated or stainless steel | |
| 焊针 | Pin header | 黄铜, 镀锡 Brass, Tin plated | |
| 塑件 | Housing | PA66, UL94V-0 | |
| 电气性能 | ELECTRICAL | UL | IEC |
| 额定电压 | Rated voltage | 300V | 250V |
| 额定电流 | Rated current | 10A | 18A |
| 接触电阻 | Contact resistance | 20mΩ | |
| 绝缘电阻 | Insulation resistance | 500MΩ/1000V | |
| 耐电压 | Withstanding voltage | AC2000V/1min | |
| 使用线径 | Wire range | 20-14AWG 2.5mm ² | |
| 机械性能 | MECHANICAL | | |
| 温度范围 | Temp. range | -40℃~+105℃ | |
| 瞬时温度 | Max. soldering | +250℃, 5sec | |
| 扭矩 | Torque | 0.4N.m 3.5Lb.in | |
| 剥线长度 | Strip length | 6-7mm | |

| | | | | | | | | | | |
|------|-----------------|--------------------|----------|-----------|-----------|------------|--|------------|-----------------------------------|------------|
| | | GENERAL TOLERANCES | | SCALE: | NAME | DATE | 康导新能源 网址: www.dgonne.com 电话: 0769-85337633 邮箱: 2850176986@qq.com 传真: 0769-85392627 | PART. NO: | KDTB0021 | |
| | | LINEAR | ANGLES | 1:1 | 黎腾 | 2017.06.16 | | DWG. NO: | | |
| AO | 新图面发行 | 2017.06.16 | UNIT: MM | 0.0±0.35 | X° REF±6° | DESIGNER | 肖坤权 | 2017.06.16 | REV: AO | SHEET: 1/1 |
| REV. | REVISION RECORD | DATE | SIZE: A4 | 0.00±0.25 | X° ±3° | DRAWN | 旷淇 | 2017.06.16 | Pitch 5.00mm Euro Terminal Blocks | |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | | | |