
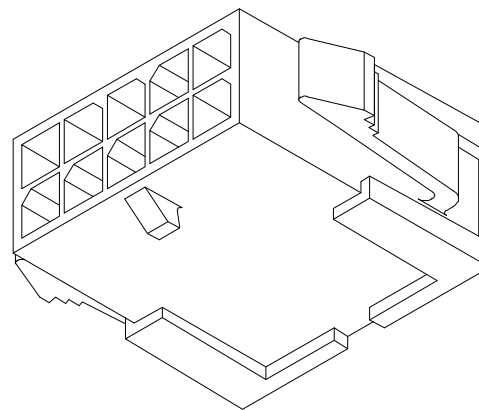
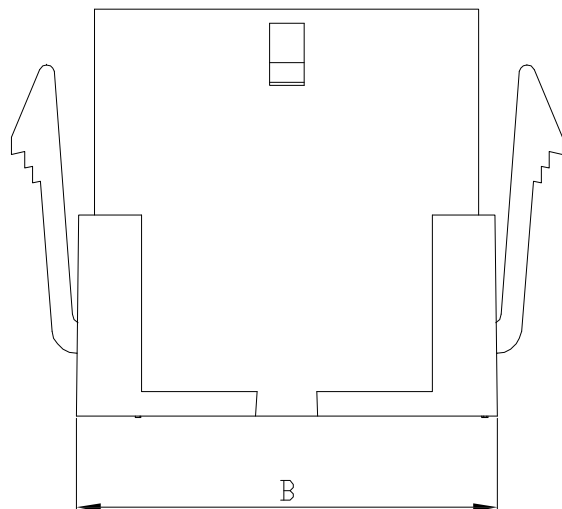
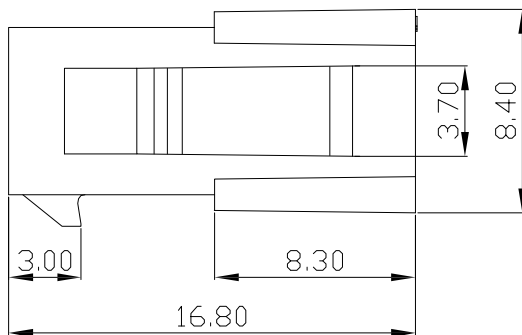


环保物料

主要技术参数 Main Specifications

线 数 (Poles): 02 to 24  
 接触电阻 (Contact resistance):  $\leq 20m\Omega$   
 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$   
 额定电压 (Rated voltage): 250V AC DC  
 额定电流 (Rated current): 5.0A AC DC  
 耐 电压 (Withstand Voltage): 1000V AC/minute  
 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$

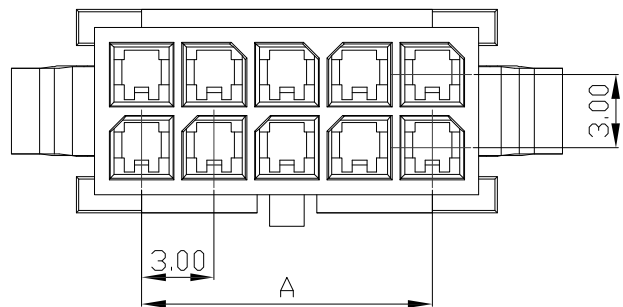

Poles	Dimensions mm	
	A	B
2	—	5.35
4	3.00	8.35
6	6.00	11.35
8	9.00	14.35
10	12.00	17.35
12	15.00	20.35
14	18.00	23.35
16	21.00	26.35
18	24.00	29.35
20	27.00	32.35
22	30.00	35.35
24	33.00	38.35

1	Housing	PA66	1	Black	
序号	图 号	名称	材 料	数量	附 注

GENERAL TOLERANCES		SCALE:	NAME	DATE
		1:1		
LINEAR		ANGLES	APPROVED	黎腾
0.0±0.35		X° REF±6°	DESIGNER	肖坤权
A0	新图面发行	2017.06.16	UNIT: MM	0.00±0.25
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15
				X° X'±2°
			DRAWN	旷淇



PART. NO:	23002A
DWG. NO:	
REV:	A0
SHEET:	1/1

TITLE: 3.00mm PITCH HOUSING